


SPECIFICATION FOR APPROVED 樣品承認書

2022
NEW

機構圖 Shape and Dimensions(mm) :

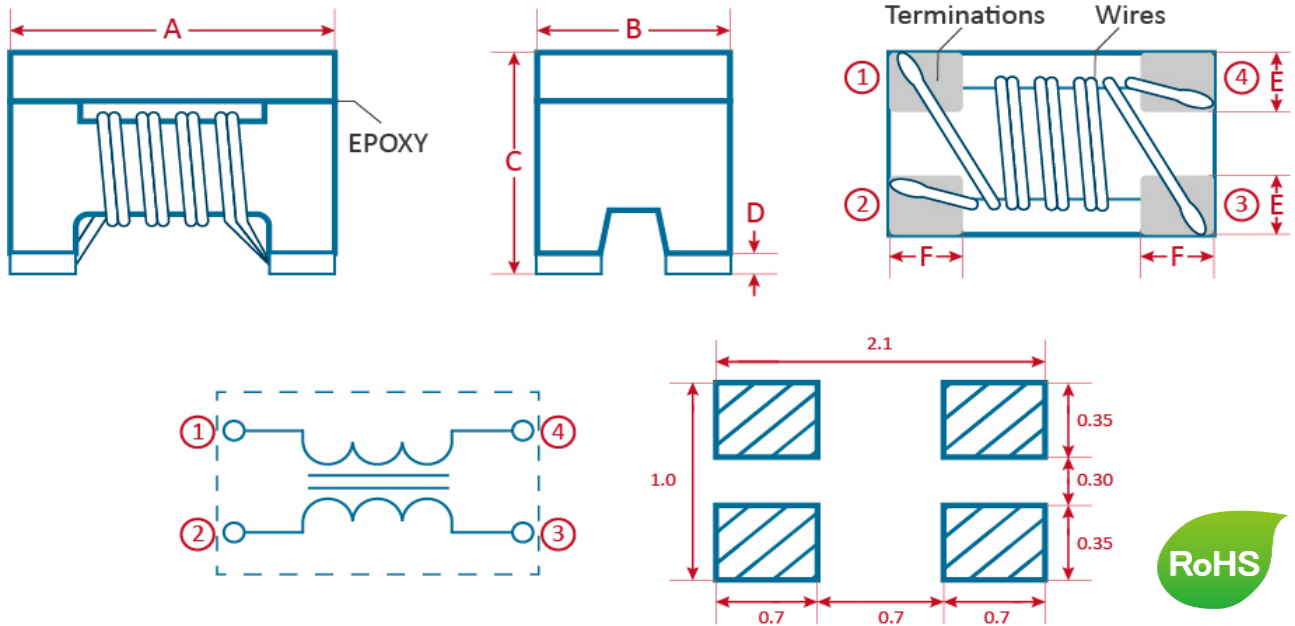

Item	A	B	C	D	E	F
CMA03	1.6 ± 0.1	0.8 ± 0.1	1.1 ± 0.1	0.1 ± 0.1	0.25 Typ.	0.33 Typ.

印字Marking : N/A

CMA03

Part No.	Z (Ω)	DCR (Ω)	IDC (mA)	Rated Voltage (V)	Insulation Resistance (MΩ)	Withstanding Voltage (V)	Tolerance
	@100MHz	Max.	Max.	Typ.	Min.	Typ.	±%
CMA03□T670	67	0.30	300	50	10	125	Y、M
CMA03□T900	90	0.30	300	50	10	125	Y、M
CMA03□T121	120	0.36	250	50	10	125	Y、M
CMA03□T161	160	0.40	200	50	10	125	Y、M
CMA03□T221	220	0.42	200	50	10	125	Y、M

SPECIFICATION FOR APPROVED
樣品承認書

 宏信科技股份有限公司
HT-TECH CORPORATION

2022
NEW

Ordering information

CMA - 03 - Y - T - 670

(1) (2) (3) (4) (5)

- (1) Type : COMMON MODE CHOKE
- (2) Size : 03 is size
- (3) Tolerance : Y=±25%, M=±20%
- (4) Packaging style : Taping Reel
- (5) Inductance : 670 for 67Ω, 900 for 90Ω, 121 for 120Ω...






Characteristics

- Operating temperature range : -25°C to +85°C
- Shielding Type for 1.0 GHz

Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

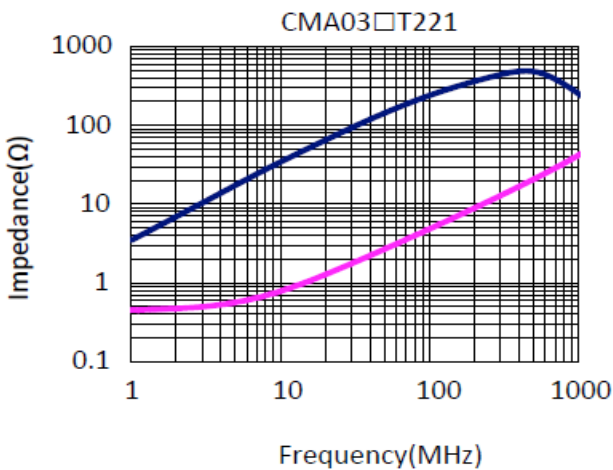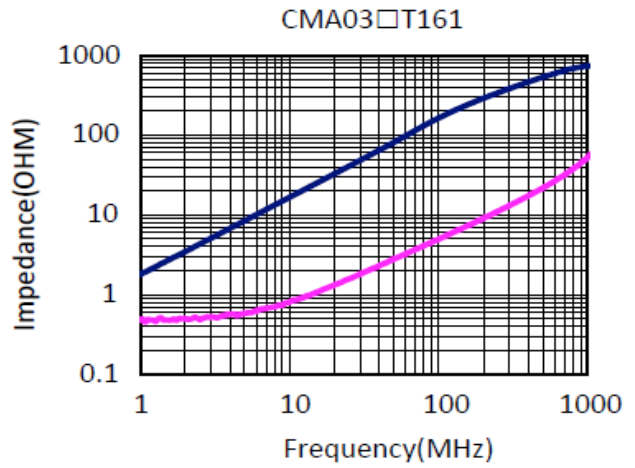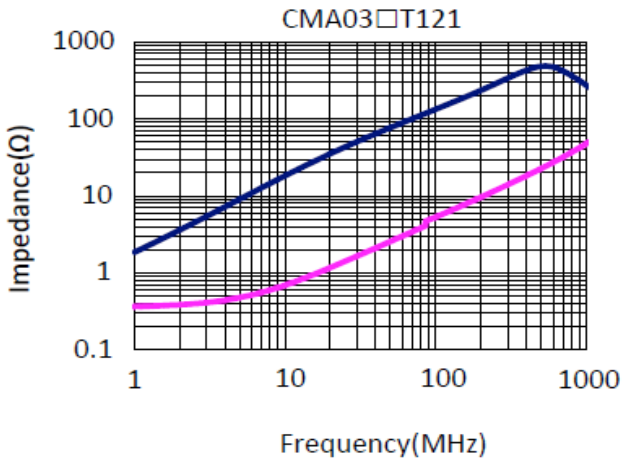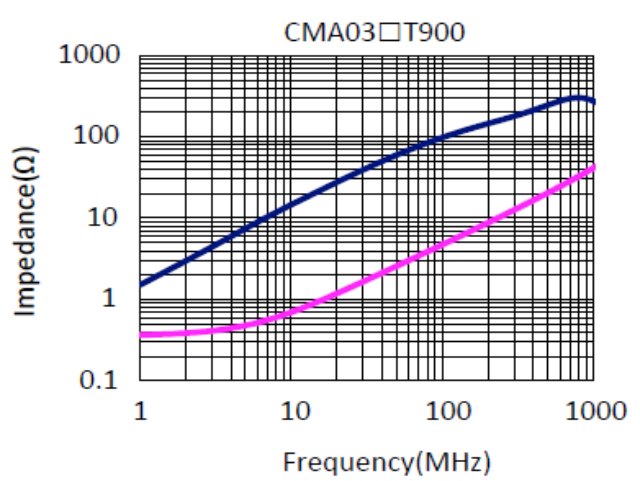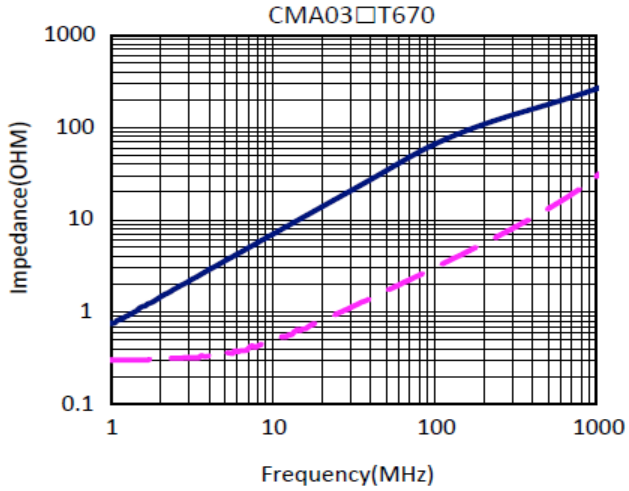

TAPE AND REEL SPECIFICATIONS

