


SPECIFICATION FOR APPROVED 樣品承認書

2022
NEW

機構圖 Shape and Dimensions(mm) :

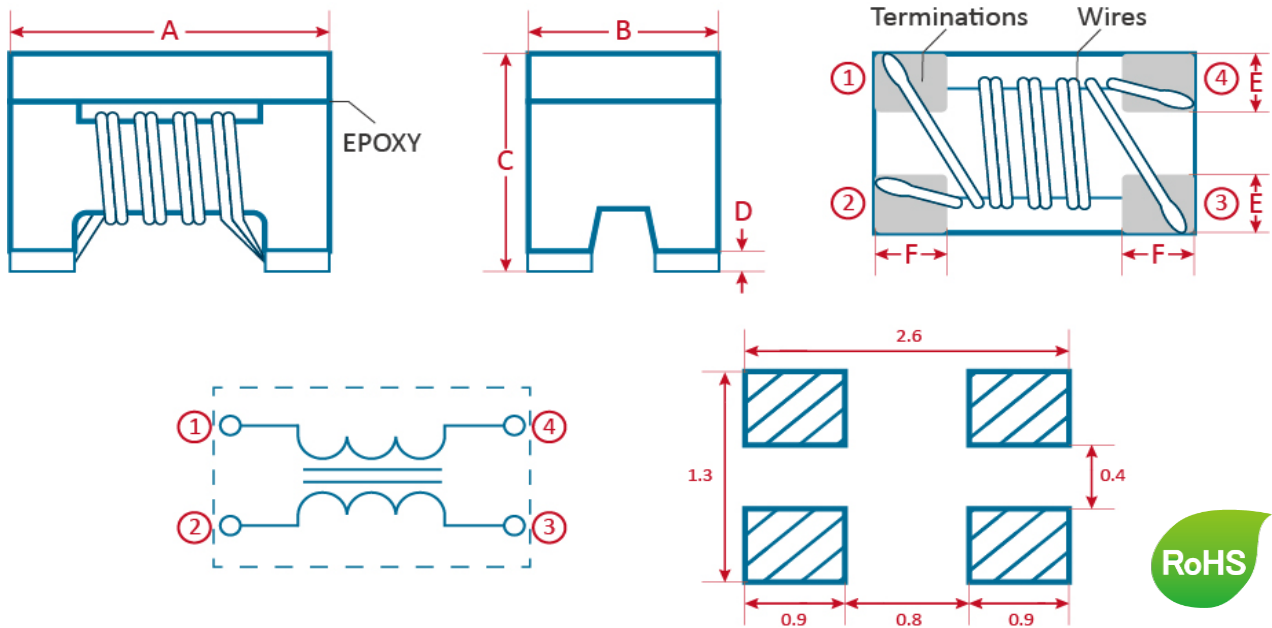

Item	A	B	C	D	E	F
CMA05D	2.0 ± 0.2	1.2 ± 0.2	1.2 ± 0.2	0.2 ± 0.1	0.40 Typ.	0.45 Typ.

印字Marking : N/A

CMA05D

Part No.	Z (Ω)	DCR (Ω)	IDC (mA)	Rated Voltage (V)	Insulation Resistance (MΩ)	Cut-off Frequency (GHz)	Characteristic Resistance (Ω)	Tolerance
	@100MHz	Max.	Max.	Typ.	Min.	Typ.	Typ.	±%
CMA05NT120D	12	0.25	420	50	10	7.5	100	N
CMA05□T240D	24	0.25	420	50	10	7.5	100	Y、M
CMA05□T250D	25	0.22	420	50	10	7.5	100	Y、M
CMA05□T320D	32	0.25	400	50	10	7.5	100	Y、M
CMA05□T600D	60	0.30	300	50	10	7.5	100	Y、M
CMA05□T670D	67	0.30	300	50	10	7.5	100	Y、M
CMA05□T900D	90	0.30	300	50	10	7.5	100	Y、M

SPECIFICATION FOR APPROVED
樣品承認書

 宏信科技股份有限公司
HT-TECH CORPORATION

2022
NEW

Ordering information

CMA - 05 - Y - T - 120D

(1) (2) (3) (4) (5) (6)

- (1) Type : COMMON MODE CHOKE
- (2) Size : 05 is size
- (3) Tolerance : Y=±25%, M=±20%, N = ±30%
- (4) Packaging style : Taping Reel
- (5) Inductance : 120 for 12Ω, 240 for 24Ω, 250 for 25Ω...
- (6) D : USB3.0 / 7.5G







Characteristics

- Operating temperature range : -25°C to +85°C


Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES:

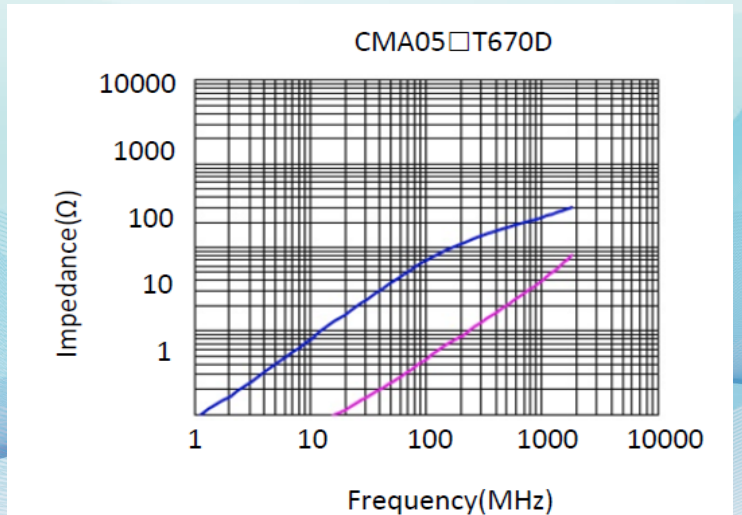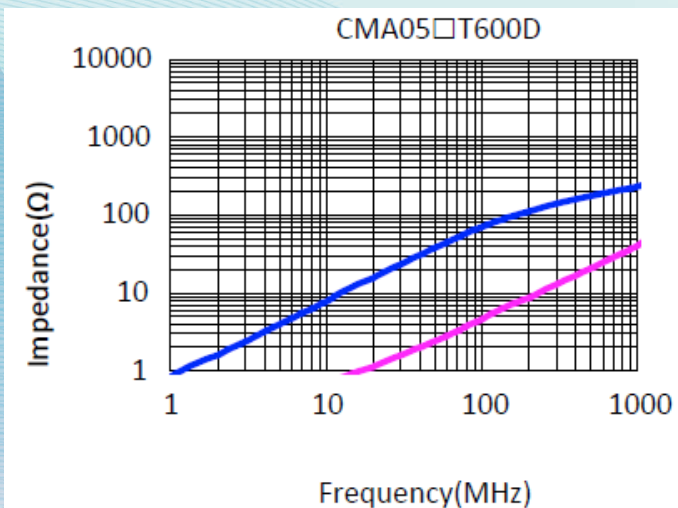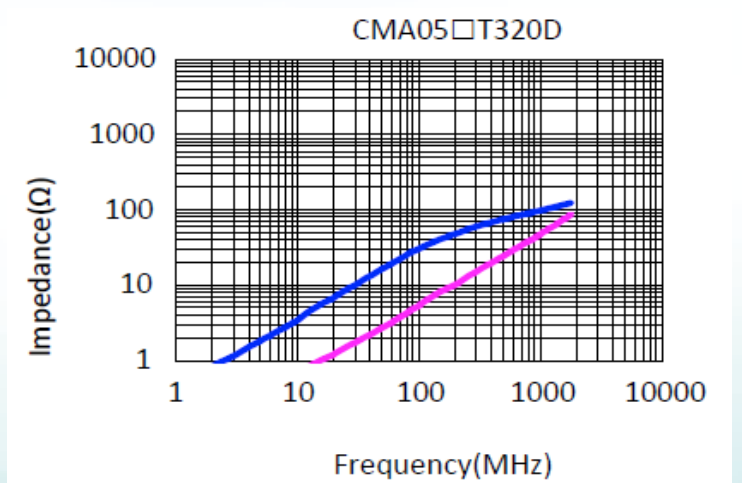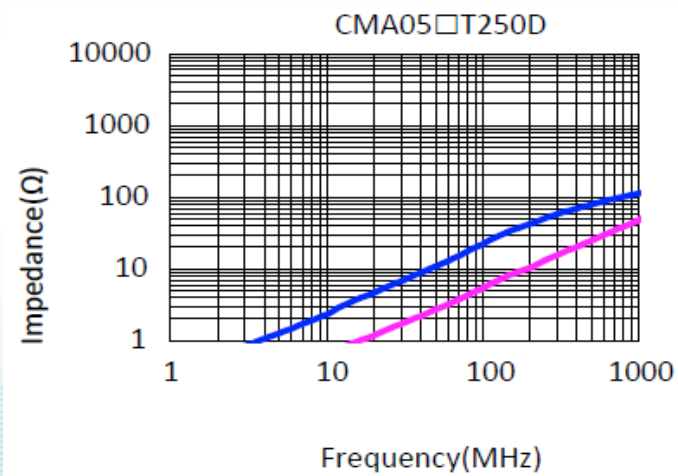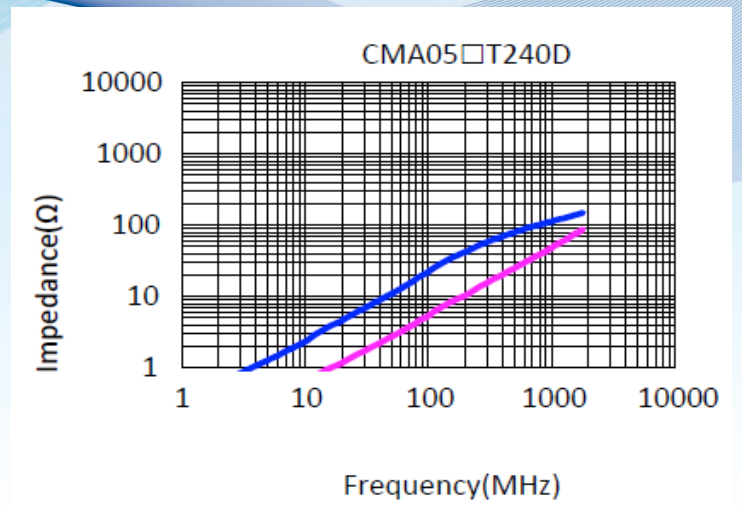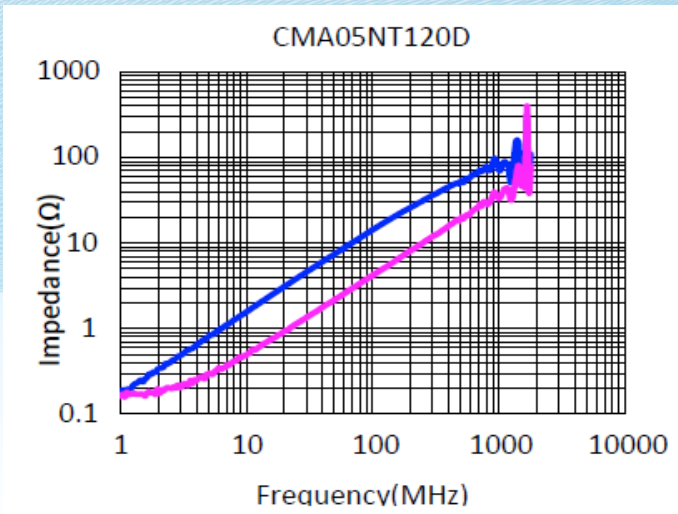

性能曲線 PERFORMANCE CURVES :

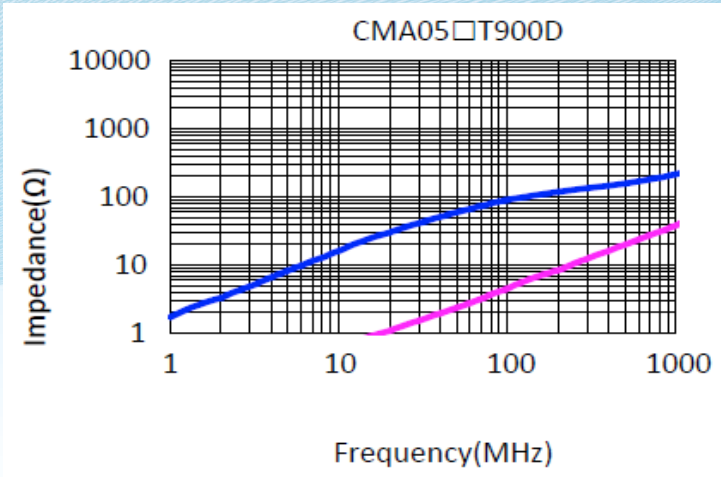

TAPE AND REEL SPECIFICATIONS

