


SPECIFICATION FOR APPROVED 樣品承認書

2022
NEW

機構圖 Shape and Dimensions(mm) :

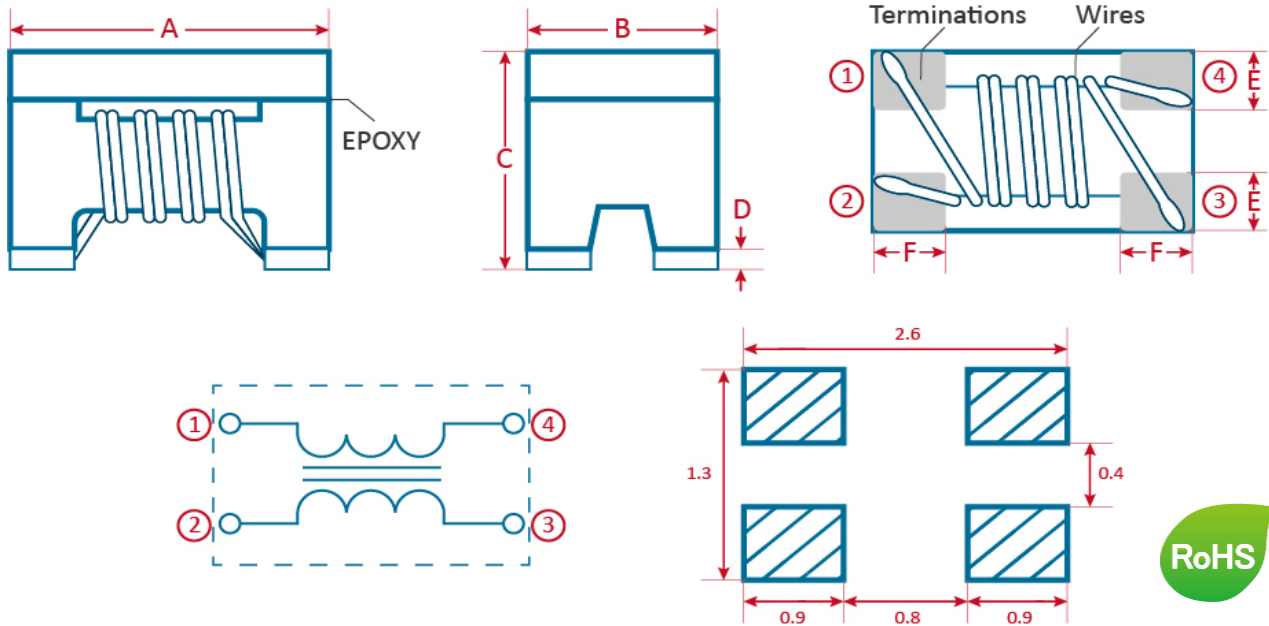

Item	A	B	C	D	E	F
CMA05-H	2.0 ± 0.2	1.2 ± 0.2	1.2 ± 0.2	0.2 ± 0.1	0.40 Typ.	0.45 Typ.

印字Marking : N/A

CMA05-H

Part No.	Z (Ω)	DCR (Ω)	IDC (mA)	Rated Voltage (V)	Insulation Resistance (MΩ)	Cut-off Frequency (GHz)	Characteristic Resistance (Ω)	Tolerance
	@100MHz	Max.	Max.	Typ.	Min.	Typ.	Typ.	±%
CMA05□T240-H	24	0.20	300	50	10	6.0	100	Y、M
CMA05□T300-H	30	0.20	300	50	10	6.0	100	Y、M
CMA05□T600-H	60	0.30	300	50	10	6.0	100	Y、M
CMA05□T900-H	90	0.30	300	50	10	6.0	100	Y、M

SPECIFICATION FOR APPROVED
樣品承認書

HT 宏信科技股份有限公司
HT-TECH CORPORATION

2022
NEW

Ordering information

CMA - 05 - Y - T - 240 - H

(1) (2) (3) (4) (5) (6)

- (1) Type : COMMON MODE CHOKE
- (2) Size : 05 is size
- (3) Tolerance : Y=±25%, M=±20%
- (4) Packaging style : Taping Reel
- (5) Inductance : 240 for 24Ω, 300 for 30Ω, 600 for 60Ω...
- (6) H : HDMI1.4 Cat2 / 6G





Characteristics

- Operating temperature range : -25°C to +85°C

Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

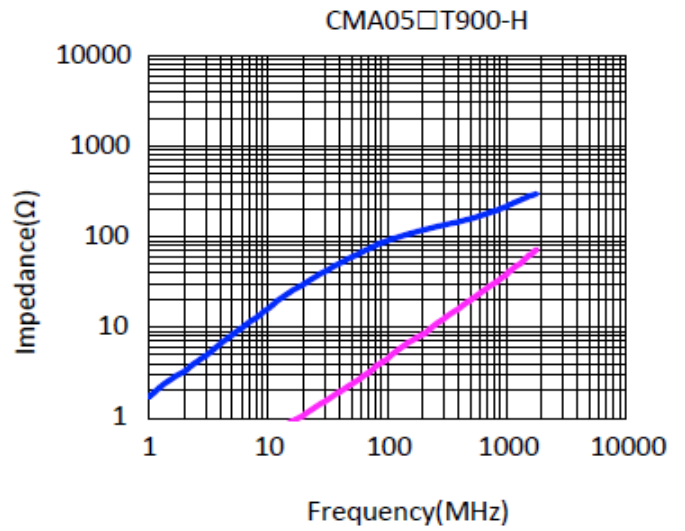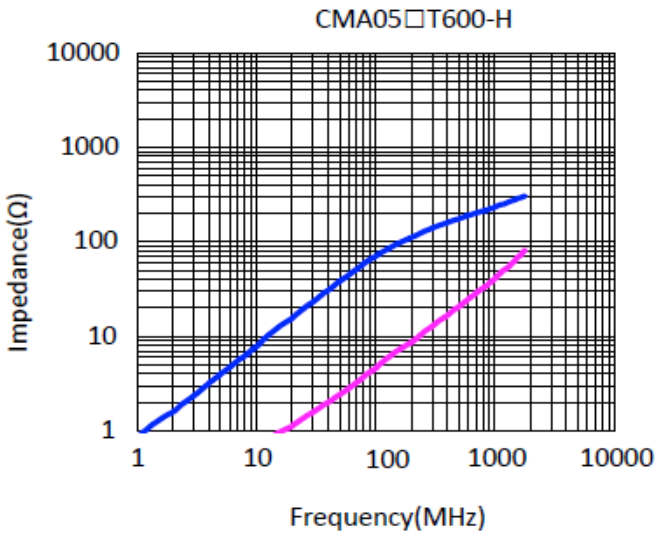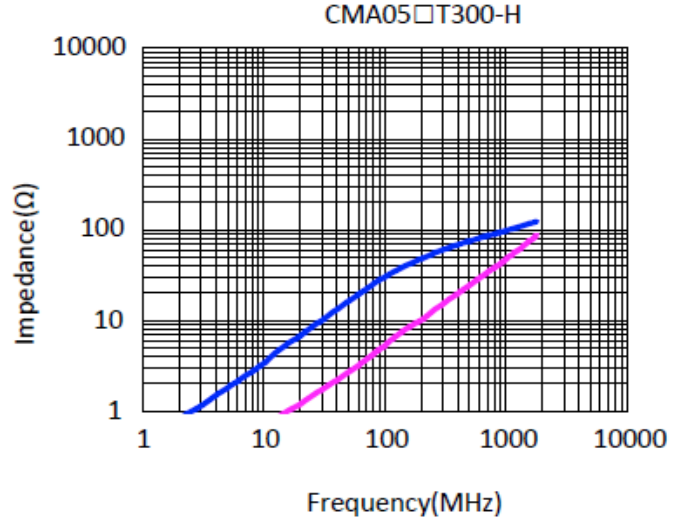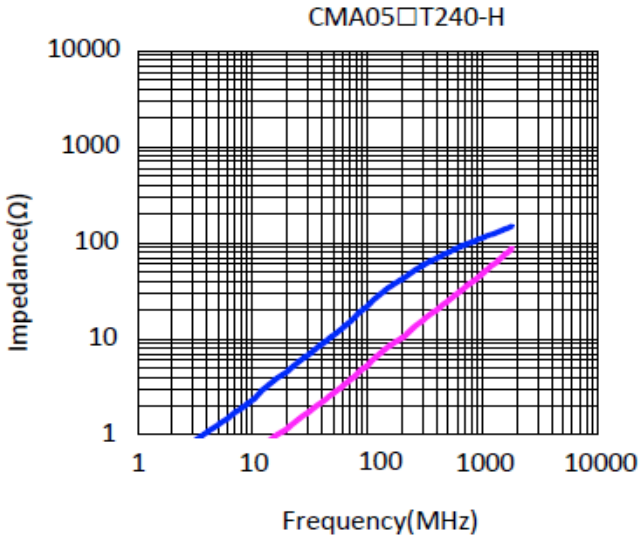

TAPE AND REEL SPECIFICATIONS

