




# SPECIFICATION FOR APPROVED 樣品承認書

2022  
NEW

## 機構圖 Shape and Dimensions(mm) :

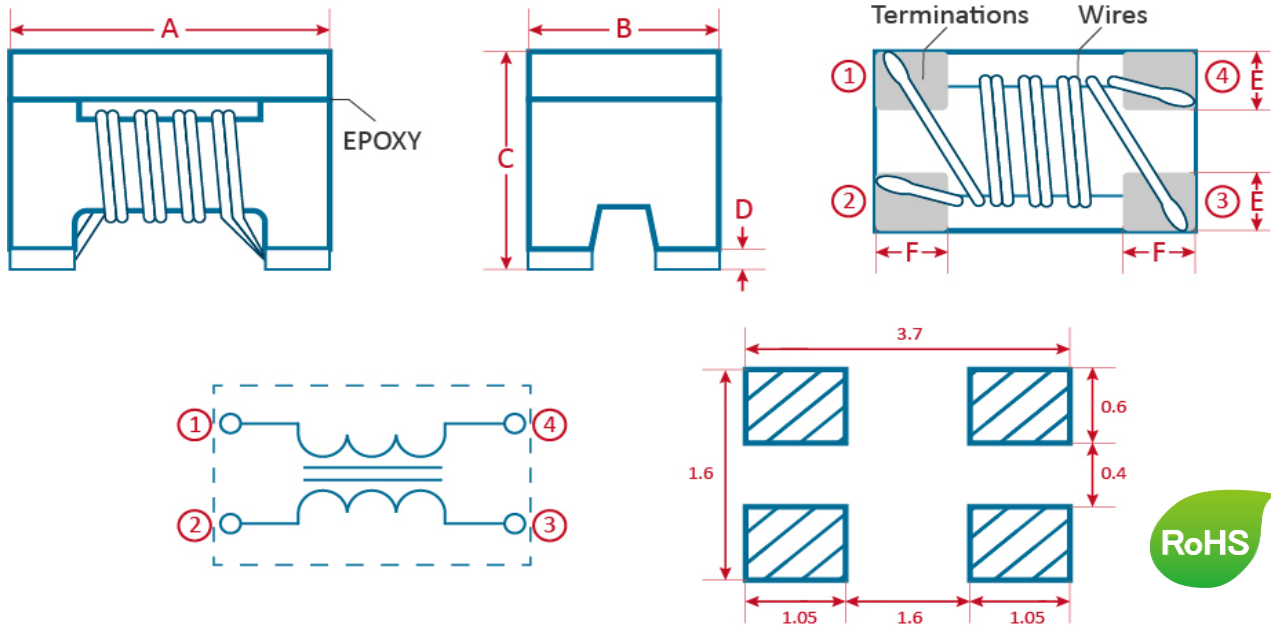

Item	A	B	C	D	E	F
CMA06	3.2 ± 0.2	1.6 ± 0.2	1.9 ± 0.2	0.2 ± 0.1	0.60 Typ.	0.60 Typ.

印字Marking : N/A

## CMA06

Part No.	Z(Ω)	DCR(Ω)	IDC(mA)	Rated Voltage(V)	Insulation Resistance (MΩ)	Withstanding Voltage (V)	Tolerance
	@100MHz	Max.	Max.	Typ.	Min.	Typ.	±%
CMA06□T670	67	0.25	400	50	10	125	Y、M
CMA06□T900	90	0.30	400	50	10	125	Y、M
CMA06□T121	120	0.35	370	50	10	125	Y、M
CMA06□T161	160	0.40	340	50	10	125	Y、M
CMA06□T181	180	0.40	340	50	10	125	Y、M
CMA06□T261	260	0.50	310	50	10	125	Y、M
CMA06□T361	360	0.60	290	50	10	125	Y、M
CMA06□T601	600	0.80	260	50	10	125	Y、M
CMA06□T102	1000	1.00	230	50	10	125	Y、M
CMA06□T222	2200	1.20	200	50	10	125	Y、M

SPECIFICATION FOR APPROVED  
樣品承認書

 宏信科技股份有限公司  
HT-TECH CORPORATION

2022  
NEW

**Ordering information**

**CMA - 06 - Y - T - 670**

(1) (2) (3) (4) (5)

( 1 ) Type : COMMON MODE CHOKE

( 2 ) Size : 06 is size

( 3 ) Tolerance : Y=25%, M=±20%

( 4 ) Packaging style : Taping Reel

( 5 ) Inductance : 670 for 67Ω, 900 for 90Ω, 121 for 120Ω...







**Characteristics**

- Operating temperature range : -25°C to +85°C





**Test equipment**

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

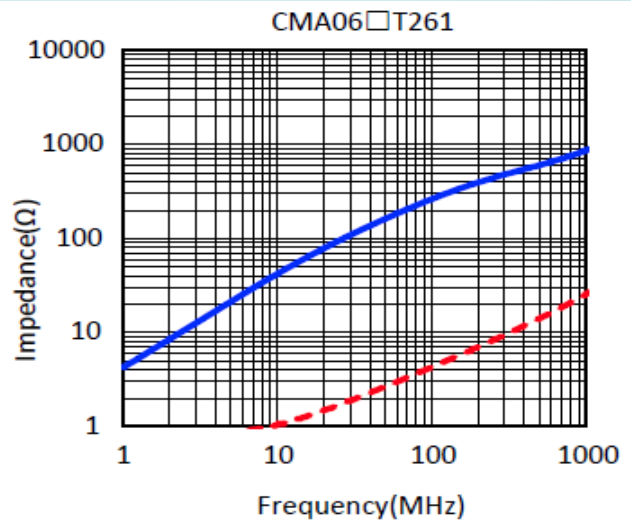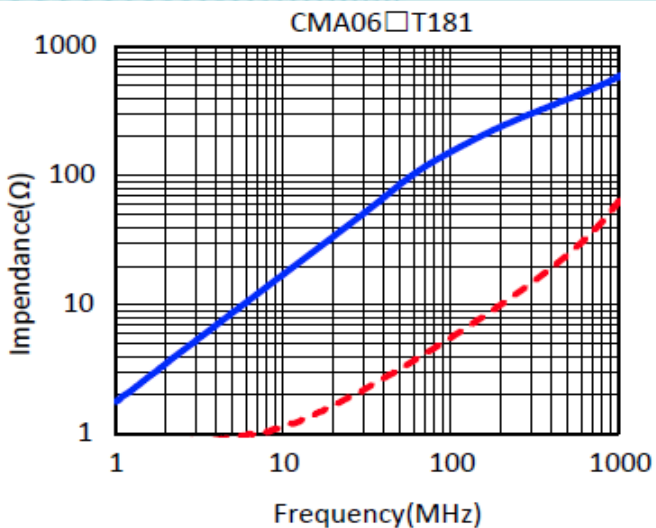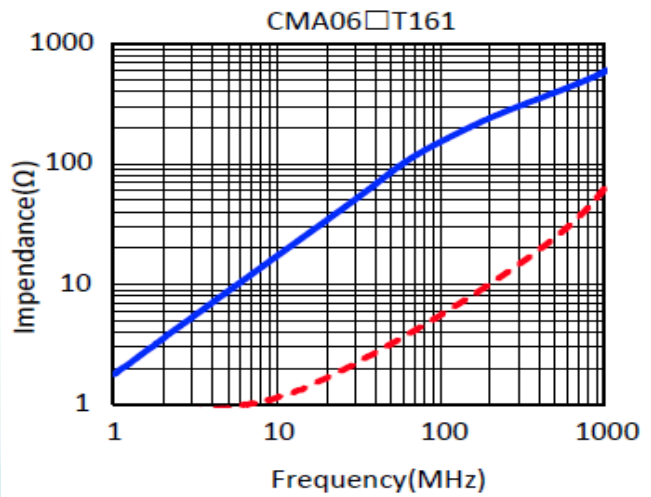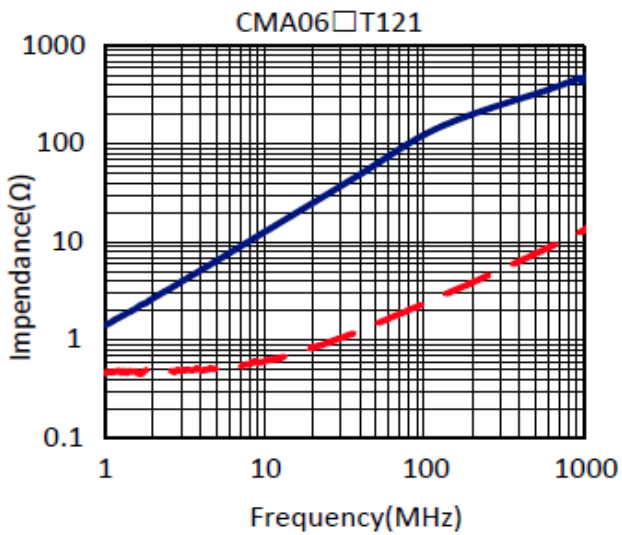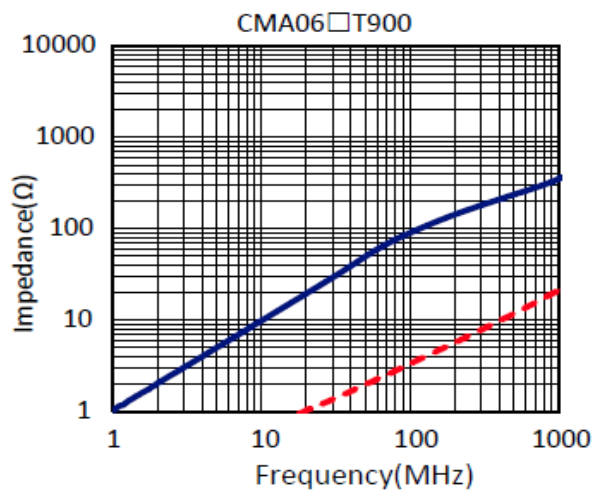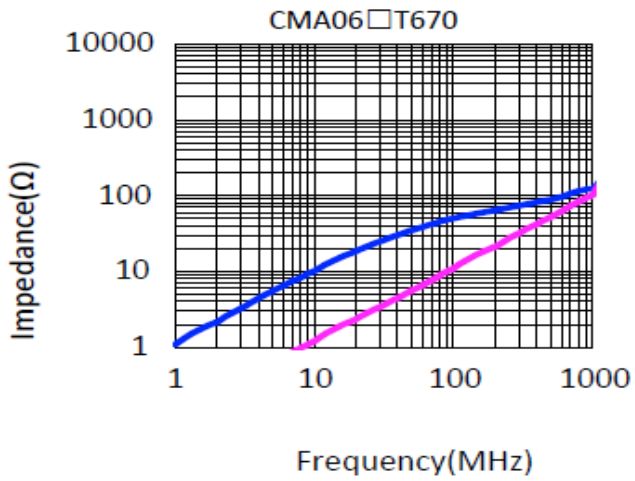

性能曲線 PERFORMANCE CURVES :

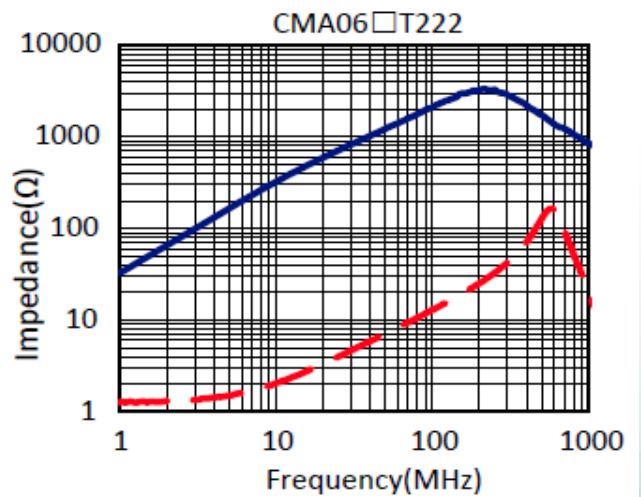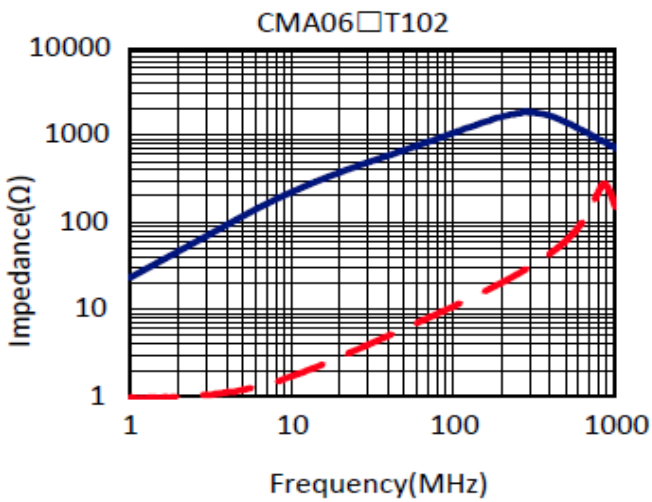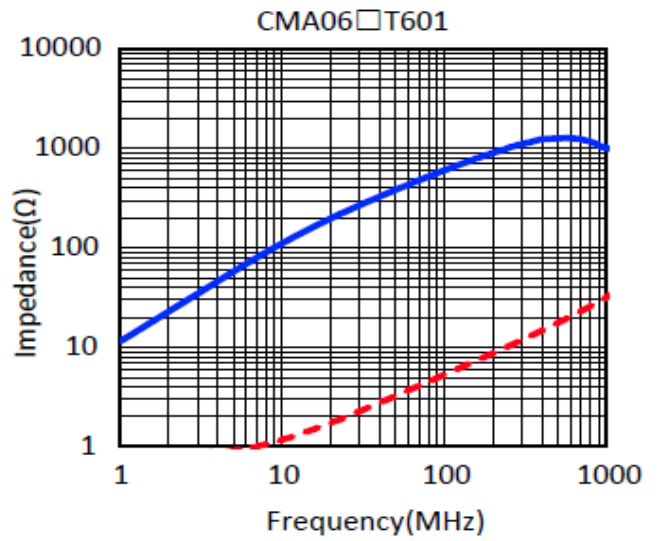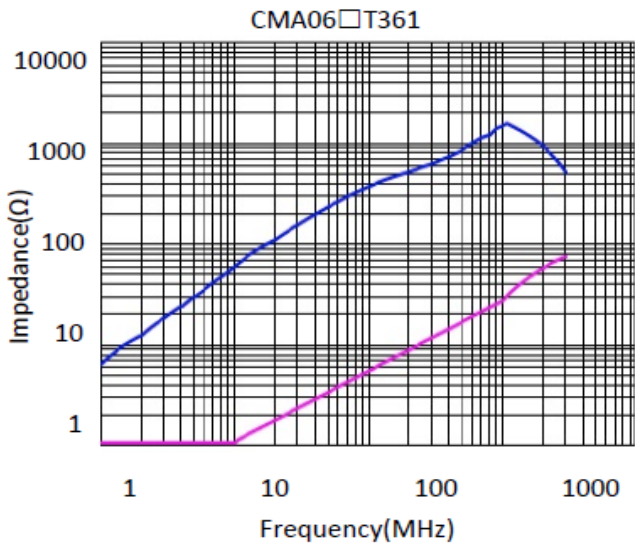

**TAPE AND REEL SPECIFICATIONS**

