


SPECIFICATION FOR APPROVED 樣品承認書

2022
NEW

機構圖 Shape and Dimensions(mm) :

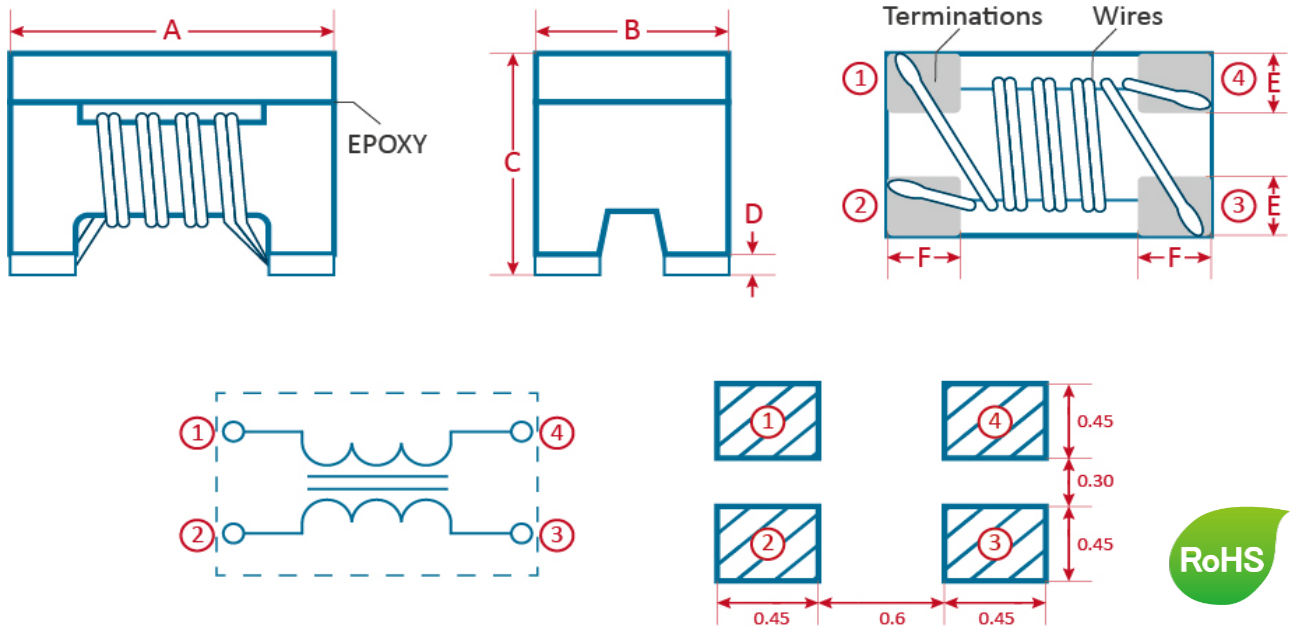

Item	A	B	C	D	E	F
CMA10E	1.2 ± 0.2	1.0 ± 0.2	1.2 Max.	0.15 Max.	0.36 Typ.	0.33 Typ.

印字Marking : N/A

CMA10E

Part No.	Z (Ω) @100MHz	DCR (Ω) Max.	IDC (mA) Max.	Rated Voltage (V) Typ.	Insulation Resistance (MΩ) Min.	Cut-off Frequency (GHz) Typ.	Characteristic Resistance (Ω) Typ.	Tolerance ±%
CMA10YT900E	90	0.50	280	20	10	10.0	90	±25%

Ordering information

CMA - 10 - Y - T - 900 - E

(1) (2) (3) (4) (5) (6)

(1) Type : COMMON MODE CHOKE

(2) Size : 10 is size

(3) Tolerance : Y=±25%

(4) Packaging style : Taping Reel

(5) Inductance : 900 for 90Ω...

(6) E : USB3.1/10GHz


Characteristics

- Operating temperature range : -25°C to +85°C

Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

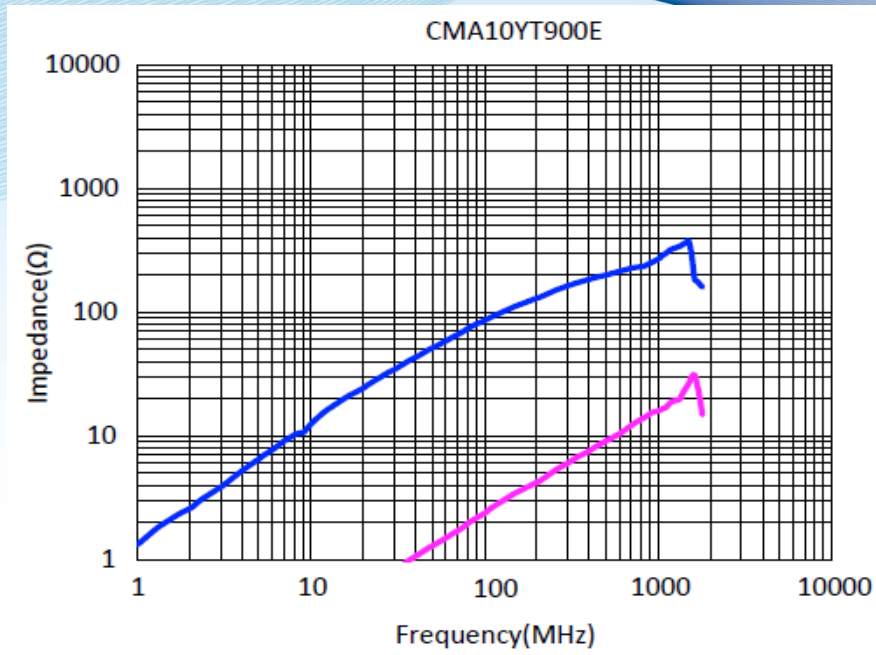

TAPE AND REEL SPECIFICATIONS

