


SPECIFICATION FOR APPROVED 樣品承認書

2022
NEW

機構圖 Shape and Dimensions(mm) :

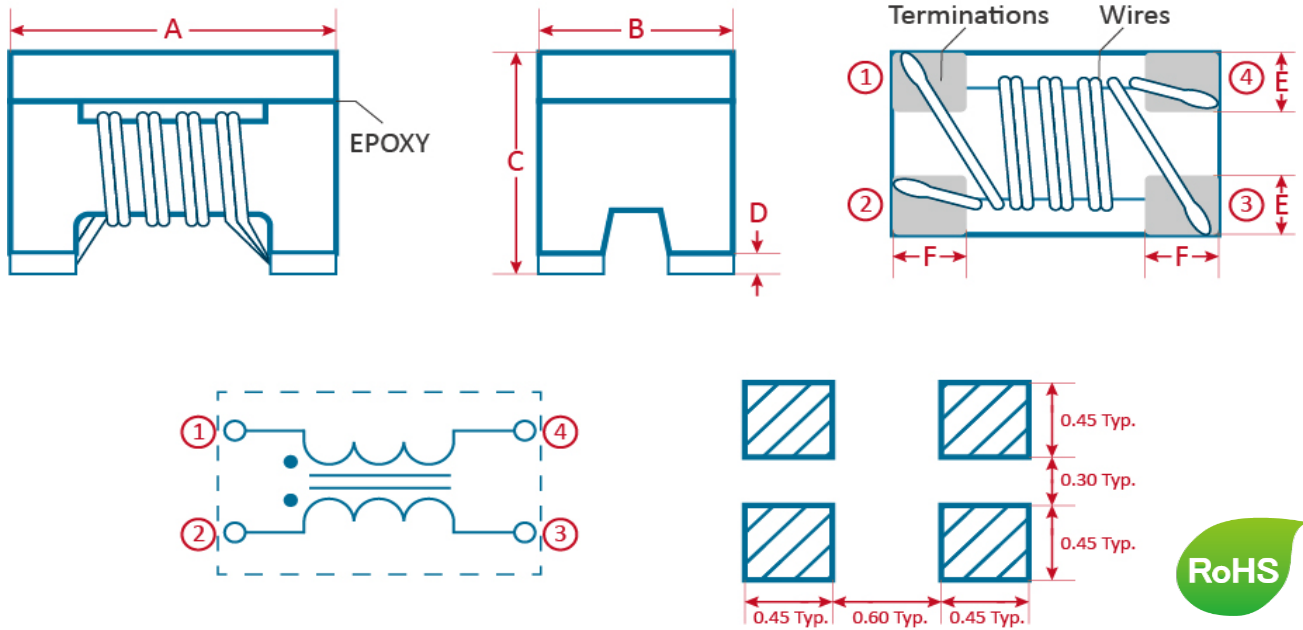

| Item | A | B | C | D | E | F |
|-------|-----------|-----------|----------|-----------|-----------|-----------|
| CMA10 | 1.2 ± 0.2 | 1.0 ± 0.2 | 0.9 Max. | 0.15 Max. | 0.36 Typ. | 0.33 Typ. |

印字Marking : N/A

CMA10

| Part No. | Z (Ω) | DCR (Ω) | IDC (mA) | Rated Voltage (V) | Insulation Resistance (MΩ) | Cut-off Frequency (GHz) | Tolerance |
|------------|----------|------------|-------------|-------------------------|----------------------------------|-------------------------------|-----------|
| | @100MHz | Max. | Max. | Typ. | Min. | Typ. | ±% |
| CMA10□T250 | 25 | 0.30 | 300 | 20 | 10 | 1.0 | Y、M |
| CMA10□T670 | 67 | 0.40 | 300 | 20 | 10 | 1.0 | Y、M |
| CMA10□T900 | 90 | 0.50 | 280 | 20 | 10 | 1.0 | Y、M |
| CMA10□T121 | 120 | 0.55 | 270 | 20 | 10 | 1.0 | Y、M |
| CMA10□T161 | 160 | 0.60 | 260 | 20 | 10 | 1.0 | Y、M |
| CMA10□T221 | 220 | 0.70 | 230 | 20 | 10 | 1.0 | Y、M |
| CMA10□T301 | 300 | 0.80 | 200 | 20 | 10 | 1.0 | Y、M |

SPECIFICATION FOR APPROVED
樣品承認書

 宏信科技股份有限公司
HT-TECH CORPORATION

2022
NEW

Ordering information

CMA - 10 - Y - T - 250

(1) (2) (3) (4) (5)

- (1) Type : COMMON MODE CHOKE
- (2) Size : 10 is size
- (3) Tolerance : Y=±25%, M=±20%
- (4) Packaging style : Taping Reel
- (5) Inductance : 250 for 25Ω, 670 for 67Ω, 900 for 90Ω...








Characteristics

- Operating temperature range : -25°C to +85°C
- Shielding Type for 1.0 GHz

Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

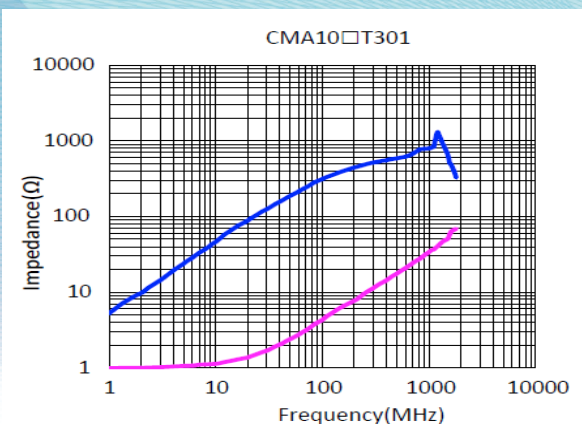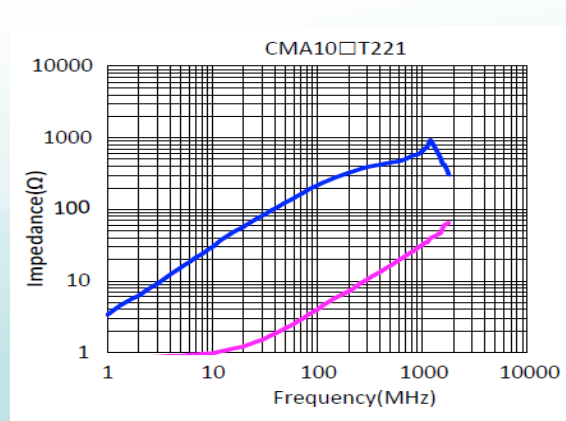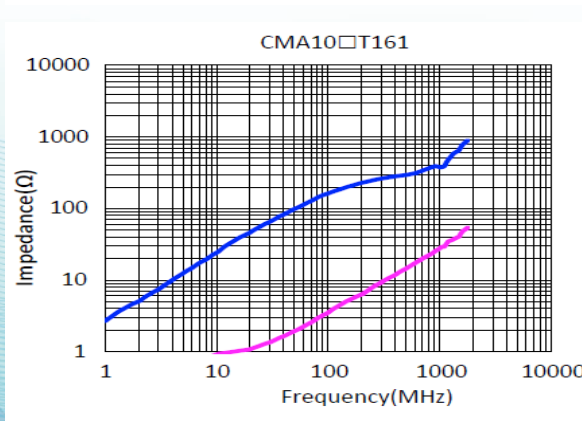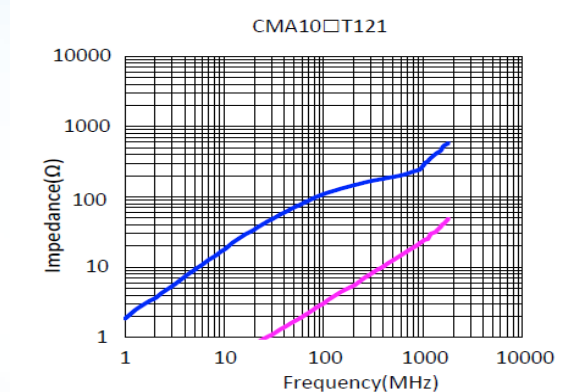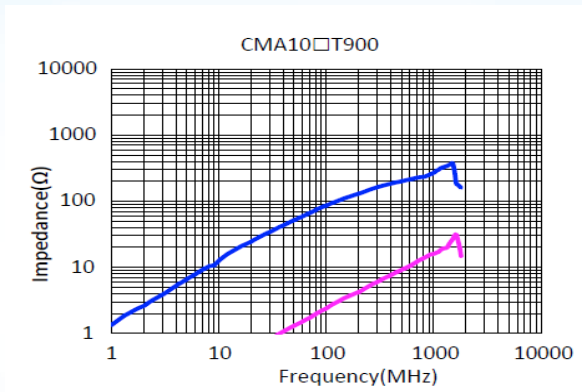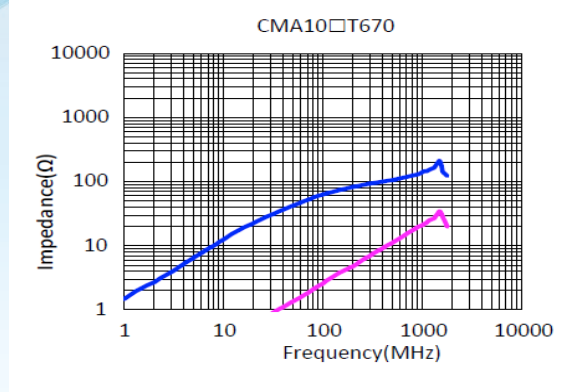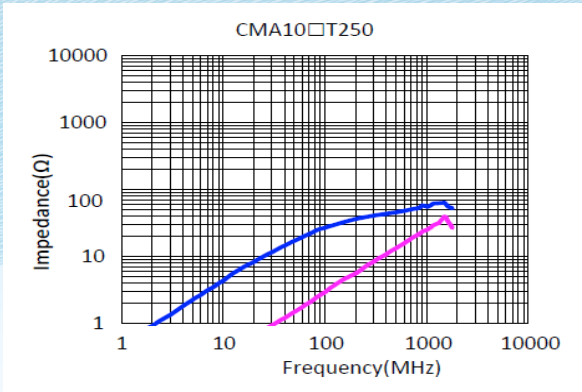

TAPE AND REEL SPECIFICATIONS

