


SPECIFICATION FOR APPROVED 樣品承認書

2022
NEW

機構圖 Shape and Dimensions(mm) :

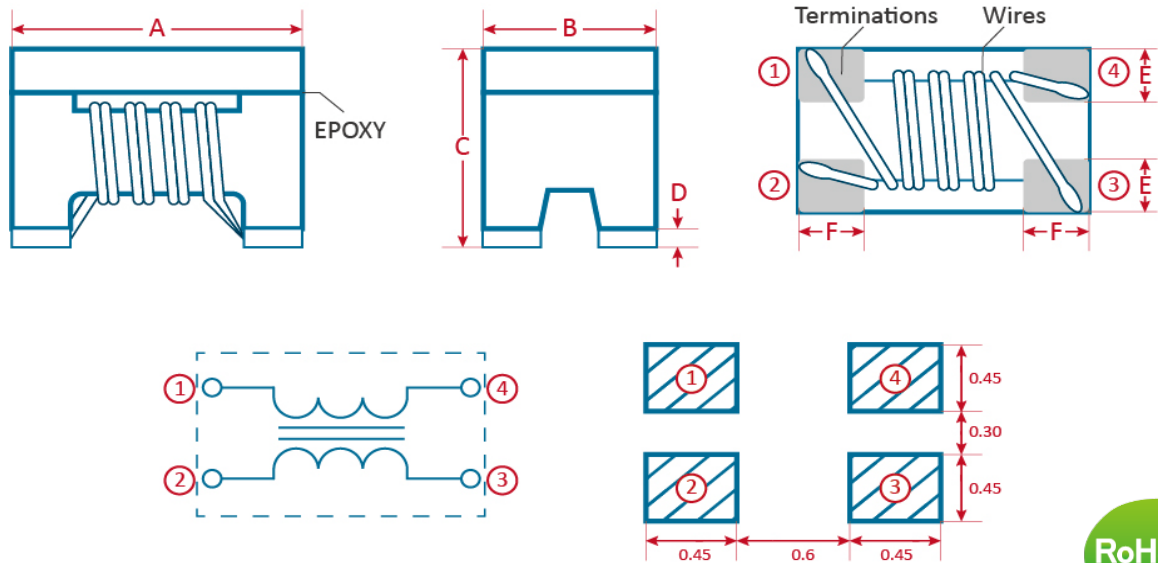

Item	A	B	C	D	E	F
CMA10D	1.2 ± 0.2	1.0 ± 0.2	0.9 Max.	0.15 Max.	0.36 Typ.	0.33 Typ.

印字Marking : N/A

CMA10D

Part No.	Z	DCR	IDC	Rated Voltage	Insulation Resistance	Cut-off Frequency	Characteristic Resistance	Tolerance
	(Ω) @100MHz	(Ω) Max.	(mA) Max.	(V) Typ.	(MΩ) Min.	(GHz) Typ.	(Ω) Typ.	±%
CMA10□T250D	25	0.30	300	20	10	7.5	90	Y、M
CMA10□T670D	60	0.40	300	20	10	7.5	90	Y、M
CMA10□T900D	90	0.50	280	20	10	7.5	90	Y、M

Ordering information

CMA - 10 - Y - T - 250 - D

(1) (2) (3) (4) (5) (6)

(1) Type : COMMON MODE CHOKE

(2) Size : 10 is size

(3) Tolerance : Y=±25%, M=±20%

(4) Packaging style : Taping Reel

(5) Inductance : 250 for 25Ω, 670 for 67Ω, 900 for 90Ω...

(6) D : USB3.0 / 7.5GHz




Characteristics

- Operating temperature range : -25°C to +85°C

Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

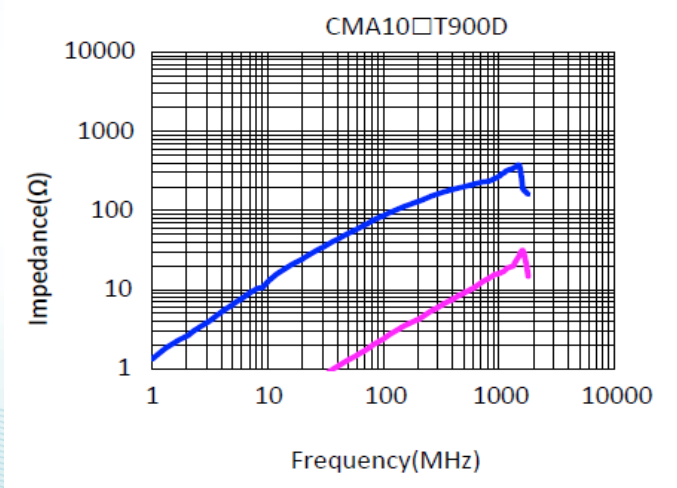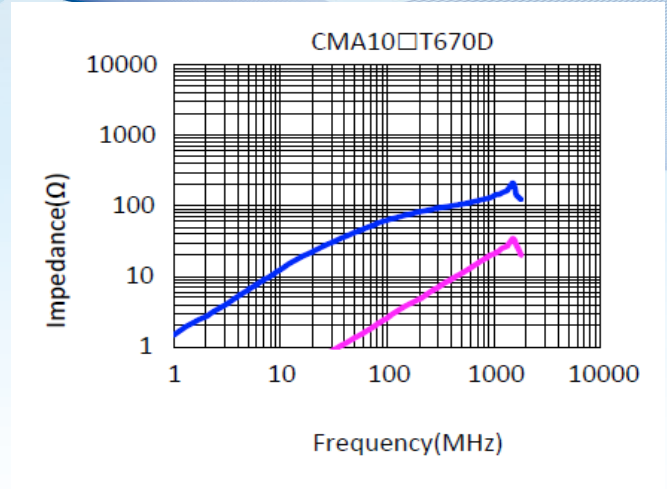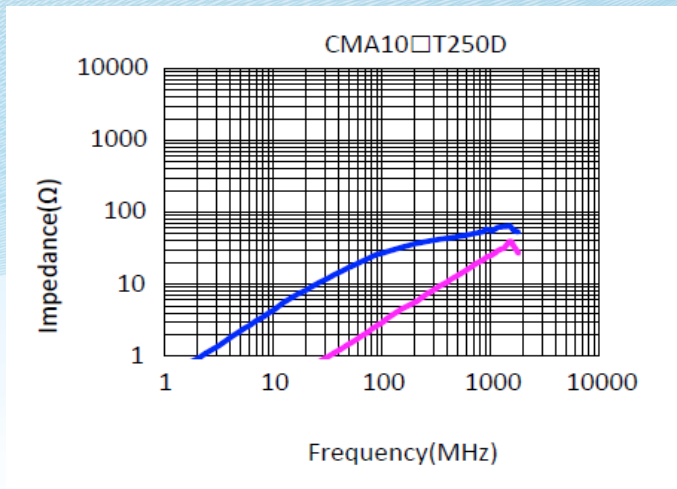

TAPE AND REEL SPECIFICATIONS

