


SPECIFICATION FOR APPROVED 樣品承認書

2023
NEW

機構圖 Shape and Dimensions(mm) :

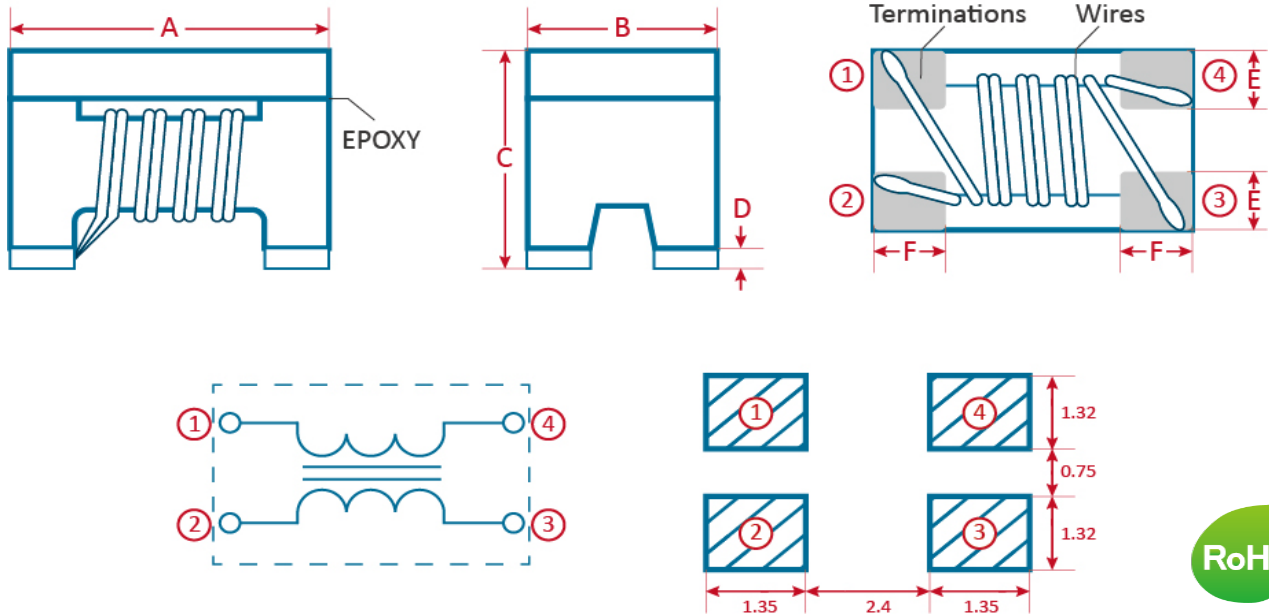

Item	A	B	C	D	E	F
CMA4532	4.5 ± 0.2	3.2 ± 0.2	2.8 ± 0.2	0.2 ± 0.1	1.20 Typ.	1.0 Typ.

印字Marking : N/A

CMA4532

Part No.	Z (Ω)	DCR (Ω)	IDC (A)	Rated Voltage (V)	Insulation Resistance (MΩ)	Tolerance
	@100MHz	Max.	Max.	Typ.	Min.	
CMA4532YT800	80	0.07	3.0	50	10	±25%
CMA4532YT121	120	0.07	3.0	50	10	±25%
CMA4532YT201	200	0.10	2.0	50	10	±25%
CMA4532YT601	600	0.30	1.5	50	10	±25%
CMA4532YT801	800	0.35	1.0	50	10	±25%
CMA4532YT102	1000	0.40	1.0	50	10	±25%

SPECIFICATION FOR APPROVED 樣品承認書

HT 宏信科技股份有限公司
HT-TECH CORPORATION

2023
NEW

Ordering information

CMA - 4532 - Y - T - 800

(1) (2) (3) (4) (5)

- (1) Type : COMMON MODE CHOKE
- (2) Size : 4532 is size
- (3) Tolerance : Y=±25%, M=±20%
- (4) Packaging style : Taping Reel
- (5) Inductance : 800 for 80Ω, 121 for 120Ω, 201 for 200Ω...







Characteristics

- Operating temperature range : -40°C to +125°C
- Typical Heat Rating DC Current would cause an approximately ΔT of 40°C

Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

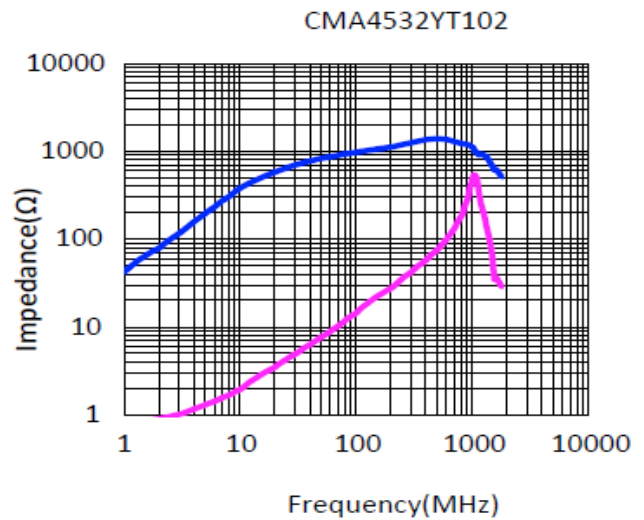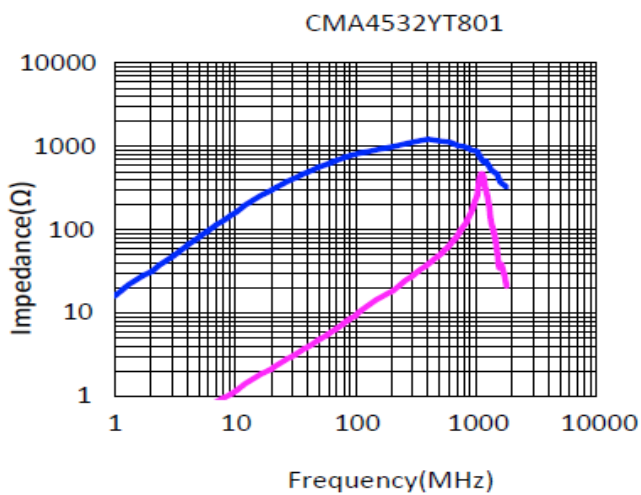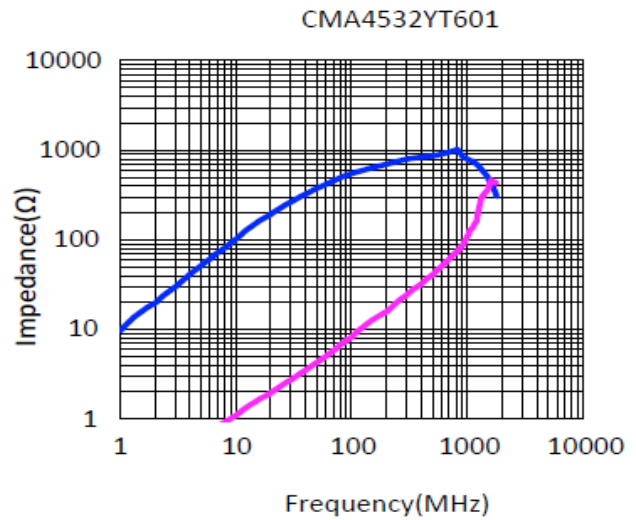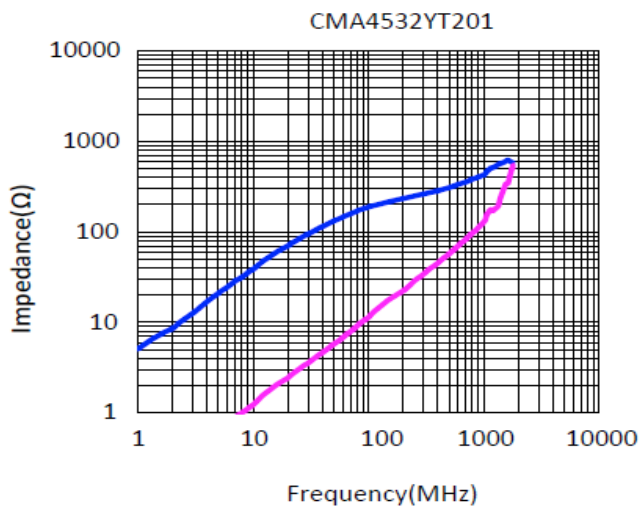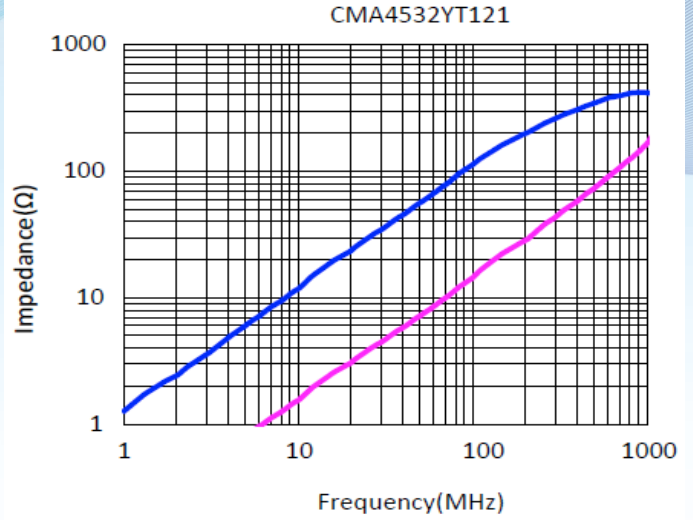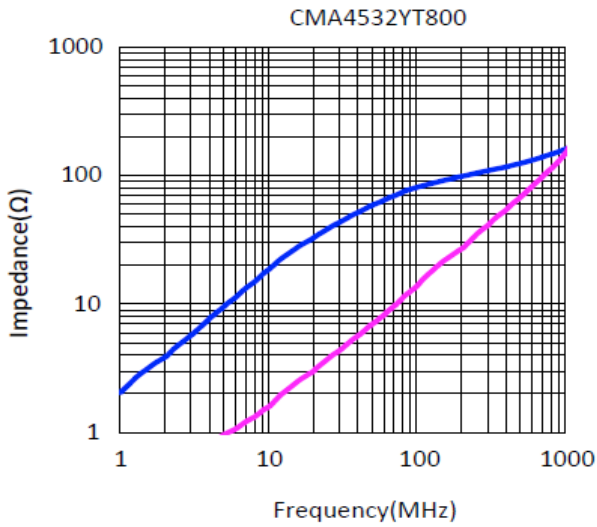

TAPE AND REEL SPECIFICATIONS

