


SPECIFICATION FOR APPROVED 樣品承認書

2022
NEW

機構圖 Shape and Dimensions(mm) :

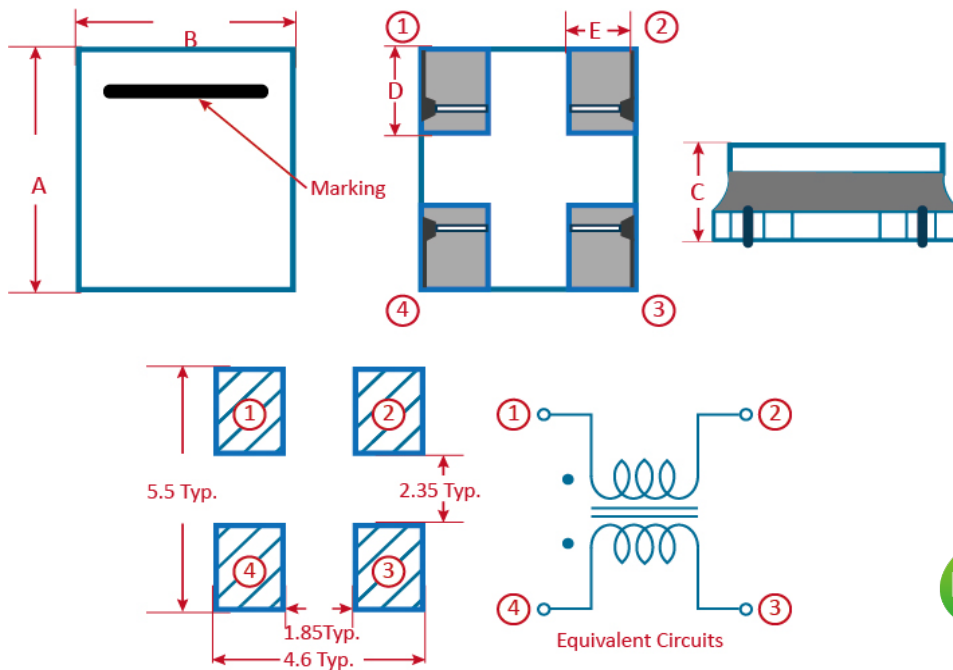

Item	A	B	C	D	E
CMA5045	5.0 ± 0.3	4.5 ± 0.3	2.5 Max.	1.6 ± 0.3	1.4 ± 0.3

印字Marking : N/A

CMA5045

Part No.	Z (Ω)	DCR (Ω)	IDC (A)	Rated Voltage (V)	Withstand Voltage (V)	Insulation Resistance (M Ω)
	@100MHz	±40%	Max.	Typ.	Typ.	Min.
CMA5045YT101	100 Typ.	0.009	6.0	50	125	10
CMA5045YT251	250 Typ.	0.014	5.0	50	125	10
CMA5045YT501	500 Typ.	0.019	4.0	50	125	10
CMA5045YT102	1000 Typ.	0.024	3.0	50	125	10
CMA5045YT142	1400 Typ.	0.040	1.5	50	125	10

SPECIFICATION FOR APPROVED 樣品承認書

HT 宏信科技股份有限公司
HT-TECH CORPORATION

2022
NEW

Ordering information

CMA - 5045 - Y - T - 101

(1) (2) (3) (4)

- (1) Type : COMMON MODE CHOKE
- (2) Size : 5045 is size
- (3) Packaging style : Taping Reel
- (4) Inductance : 101 for 100Ω, 251 for 250Ω, 501 for 500Ω...







Characteristics

- Operating temperature range : -40°C to +85°C
- Typical Heat Rating DC Current would cause an approximately ΔT of 40°C

Test equipment

- Test Frequency : 100MHz

性能曲線 PERFORMANCE CURVES :

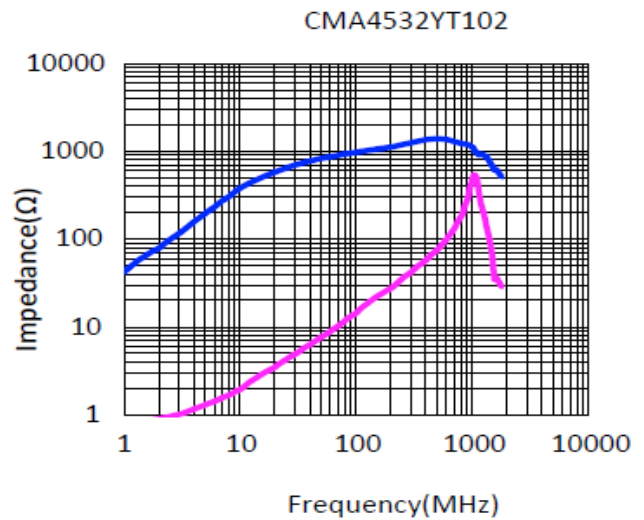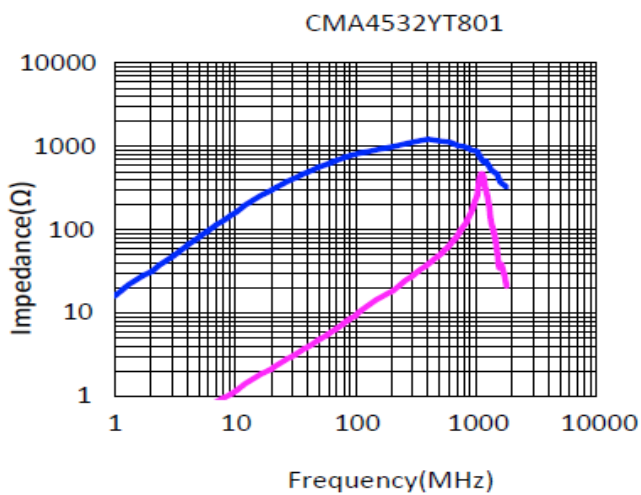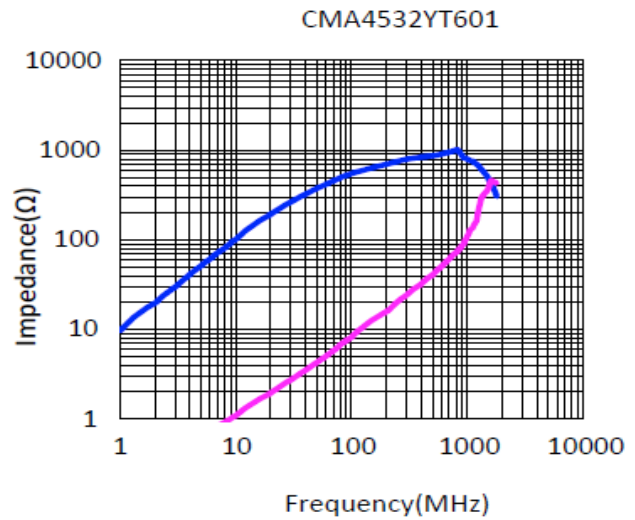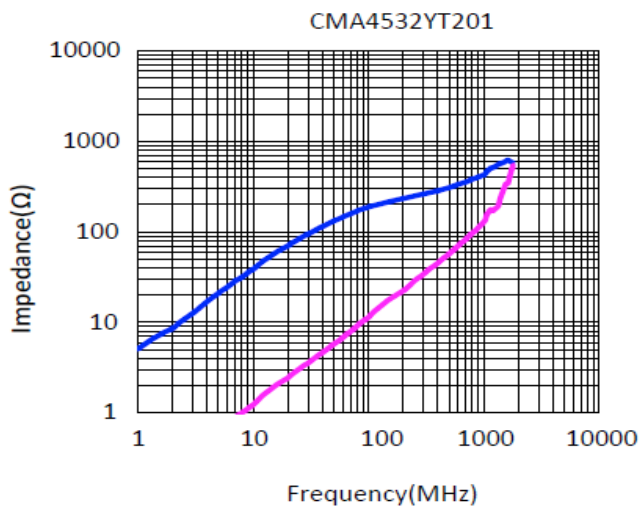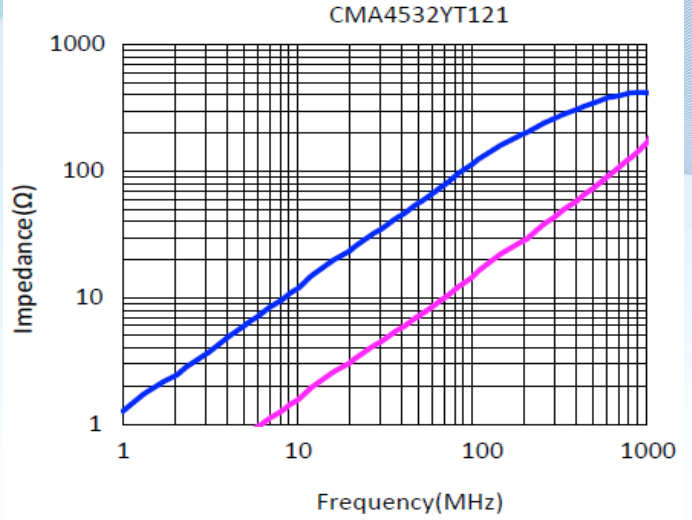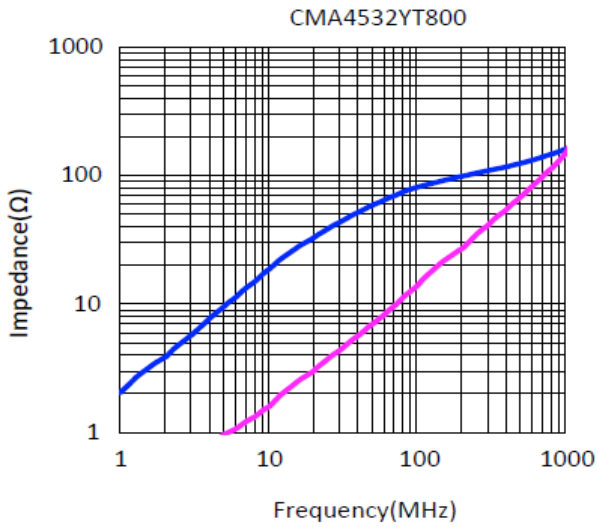

TAPE AND REEL SPECIFICATIONS

