

SPECIFICATION FOR APPROVED
樣品承認書

2023
 NEW

料號 P/N : SAB1770MT220-M

機構圖 Shape and Dimensions(mm) :

Item	A	B	C	D	E
規格 Spec.	18.3 ± 0.5	17.0 ± 0.5	7.0 Max.	12.0 ± 0.3	3.0 ± 0.5
實測值 Typ.					

印字Marking : 220 (印字顏色因生產設備而有所差異)


電特性要求 Electrical Characteristics :

Item	規格 Specifications	定義Note
L	22uH ±20%	
Test Freq	@100KHz/ 1.0V	
DCR	35mΩ Max.	
Isat	18A Typ.	
Irms	12A Typ.	
Oper. Temp	-40°C to +125°C	

- 註 : 1. Absolute maximum voltage 30VDC
 2. Isat: DC current (A) that will cause L0 to drop approximately 30 %.(Typical)
 3. Irms: DC current (A) that will cause an approximate ΔT of 40 °C.(Typical)
 (reference ambient temperature is 25°C).

料號 P/N : SAB1770MT220-M

性能曲線 PERFORMANCE CURVES :

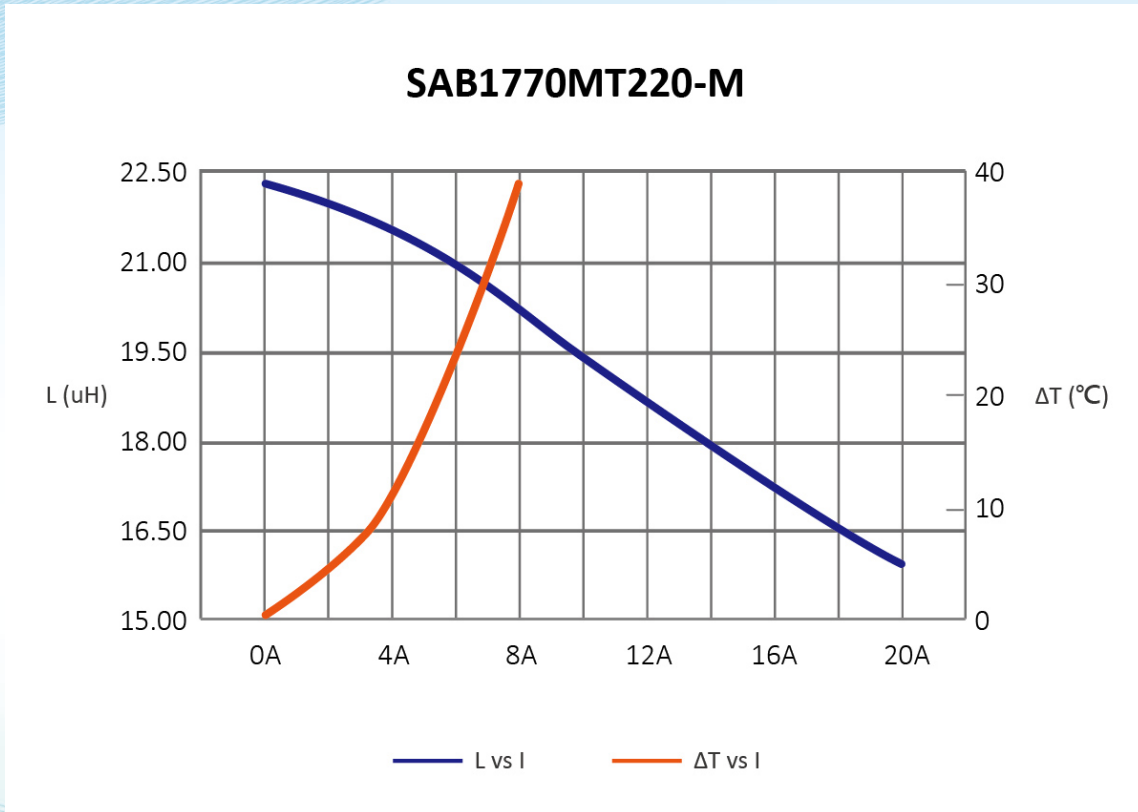

TAPE AND REEL SPECIFICATIONS

