




# SPECIFICATION FOR APPROVED 樣品承認書

2023  
NEW

## 機構圖 Shape and Dimensions(mm):

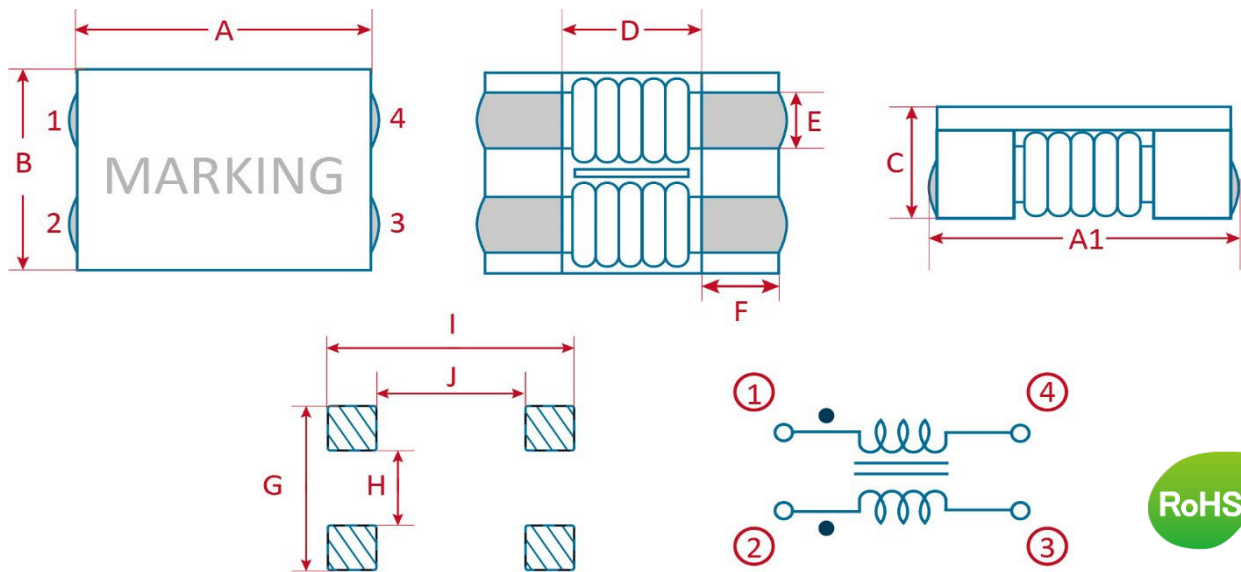

Item	A	A1	B	C	D	E	F	G	H	I	J
CMC7060	7.0±0.5	7.5±0.5	6.0±0.5	3.8 Max.	3.5 Typ.	1.5 Typ.	1.7 Typ.	5.0 Typ.	1.5 Typ.	8.0 Typ.	3.0 Typ.

印字Marking: 印字顏色因生產設備而有所差異

## CMC7060

Part No.	Z(Ω)		DCR(mΩ)	Rated Current(A)	IR(mΩ)	Rated Voltage(V)
	Min.	Typ.	Max.	Max.	Min.	Max.
CMC7060-400	40	70	5.0	15.0	10	125
CMC7060-101	100	140	10	9.0	10	125
CMC7060-301	225	300	10	5.0	10	125
CMC7060-501	275	450	10	5.0	10	125
CMC7060-601	500	700	15	4.0	10	125
CMC7060-701	500	700	15	4.0	10	125
CMC7060-102	800	1020	17	3.0	10	125
CMC7060-132	910	1300	21	2.5	10	125
CMC7060-272	2000	2700	63	1.0	10	125
CMC7060-302	2500	3000	75	0.9	10	125

SPECIFICATION FOR APPROVED  
樣品承認書

 宏信科技股份有限公司  
HT-TECH CORPORATION

2023  
NEW

**Ordering information**

CMC7060 - 301

(1) (2)

( 1 ) Type : COMMON MODE CHOKE

( 2 ) Inductance : R22 for 0.22uH,1R0 for 1.00uH,2R2 for 2.2uH...

**Characteristics**

- Rated Current : DC current (A)that will cause an approximate  $\Delta T$  of 40°C

(Typical)


- Operating temperature range : -40°C to +125°C

**Test equipment**


- Test Frequency : 100MHz ,0.5 Vrms.




**CMC7060-400**

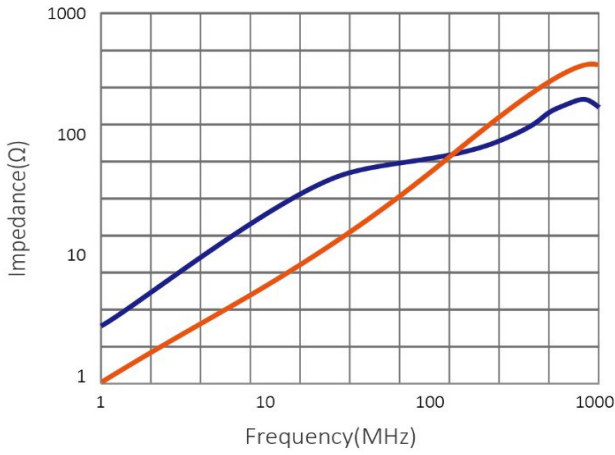


**CMC7060-101**

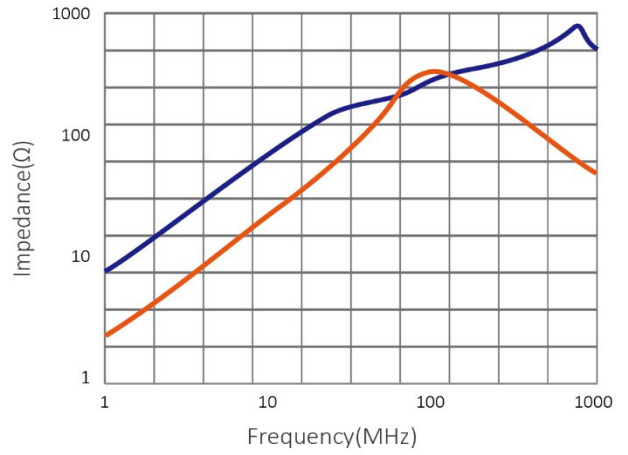


**CMC7060-301**

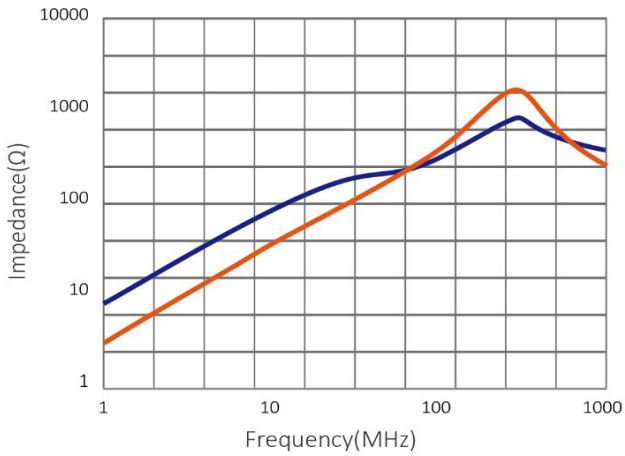


**CMC7060-501**




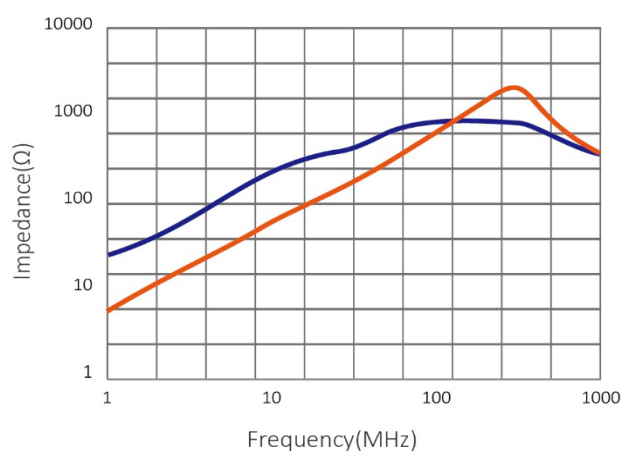


**CMC7060-601**

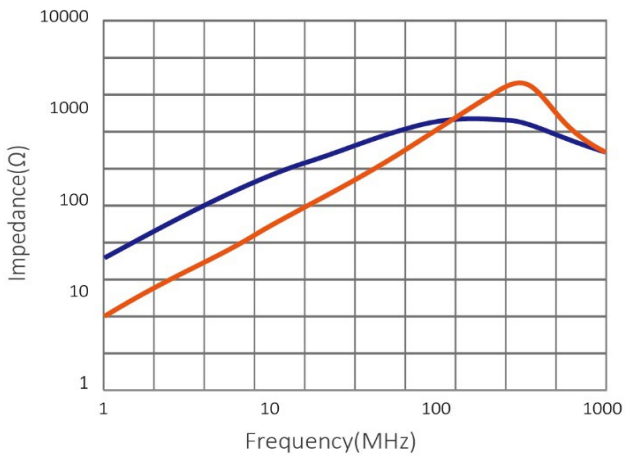

**CMC7060-701**

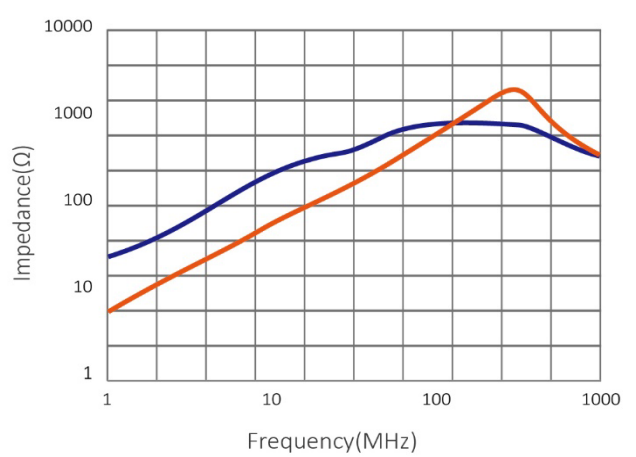

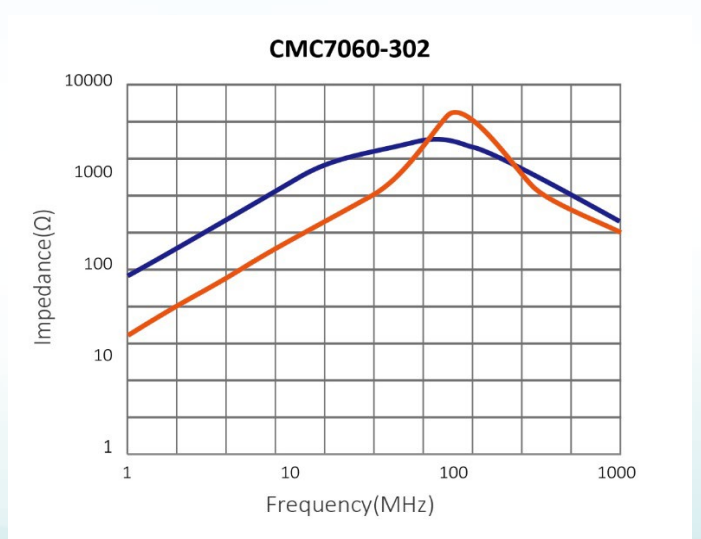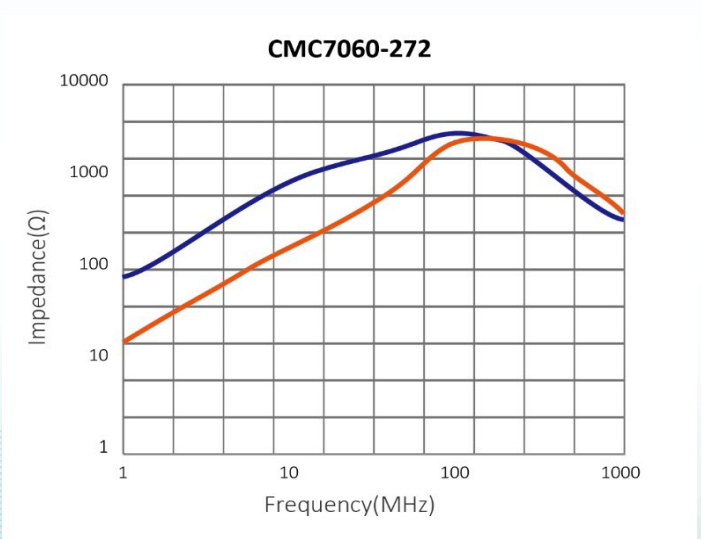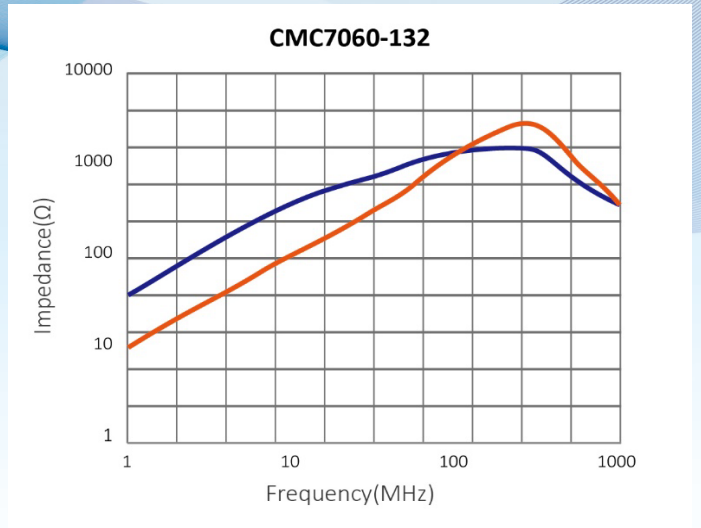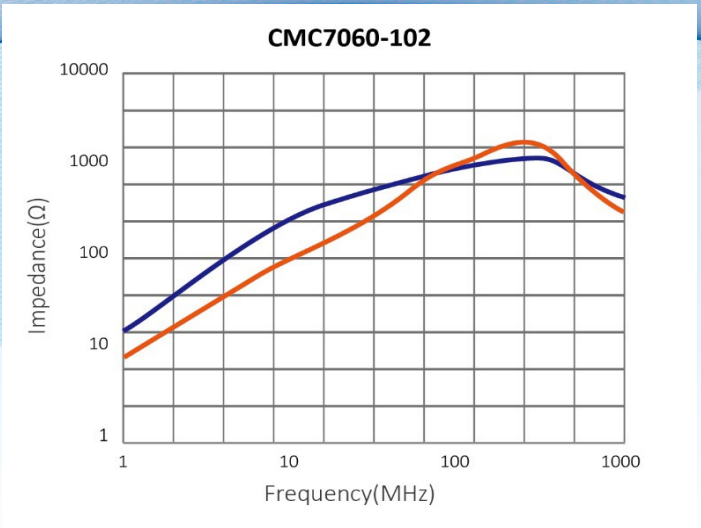

**TAPE AND REEL SPECIFICATIONS**

