




# SPECIFICATION FOR APPROVED 樣品承認書

2023  
NEW

## 機構圖 Shape and Dimensions(mm) :

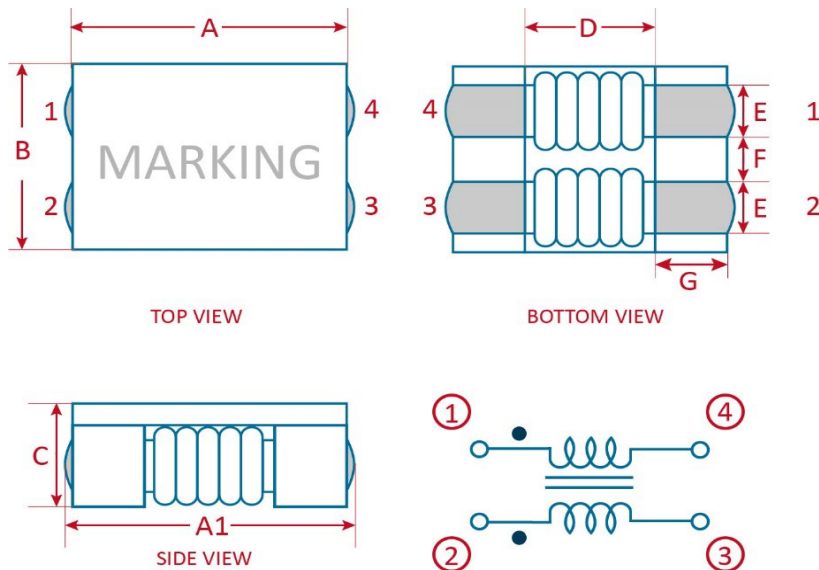

Item	A	A1	B	C	D	E	F	G
CMC1211	12.0 ± 0.5	12.5 ± 0.5	10.8 ± 0.5	6.4 Max.	7.0 Typ.	2.7 ± 0.2 Typ.	2.5 ± 0.2 Typ.	2.5 ± 0.2 Typ.

印字Marking : 印字顏色因生產設備而有所差異

## CMC1211

Part No.	Z(Ω)		DCR(mΩ)	Rated Current(A)	IR(mΩ)	Rated Voltage(V)	
	Min.	Typ.	Max.	Max.	Min.	Max.	
CMC1211-800	80	230	2.0	10.0	10.0	125.0	
CMC1211-701	500	700	6.0	8.0	10.0	125.0	
CMC1211-801	600	800	8.0	8.0	10.0	125.0	
CMC1211-102	750	1000	14.0	6.0	10.0	125.0	
CMC1211-222	2200	2500	35.0	1.8	10.0	125.0	
CMC1211-272	2300	2700	50.0	1.5	10.0	125.0	

SPECIFICATION FOR APPROVED  
樣品承認書

 宏信科技股份有限公司  
HT-TECH CORPORATION

2023  
NEW

**Ordering information**

CMC1211 - 800

(1) (2)

(1) Type : COMMON MODE CHOKE







(2) Inductance : R22 for 0.22uH,1R0 for 1.00uH,2R2 for 2.2uH...

**Characteristics**

- Rated Current : DC current (A)that will cause an approximate  $\Delta T$  of 40°C (Typical)
- Operating temperature range : -40°C to +125°C

**Test equipment**

- Test Frequency : 100MHz ,0.5 Vrms.

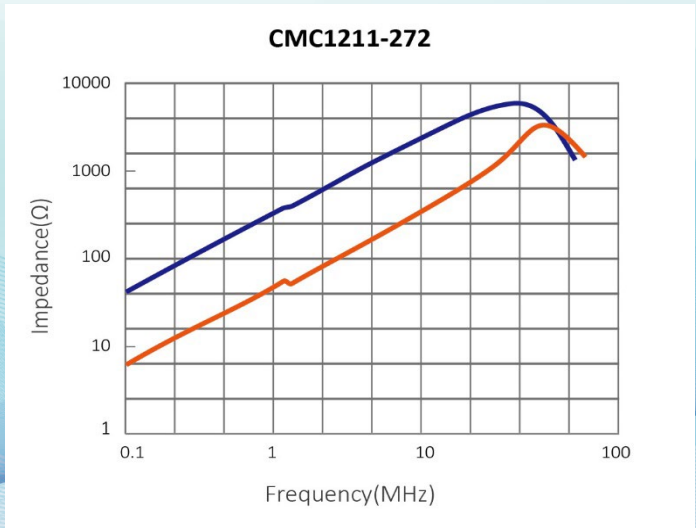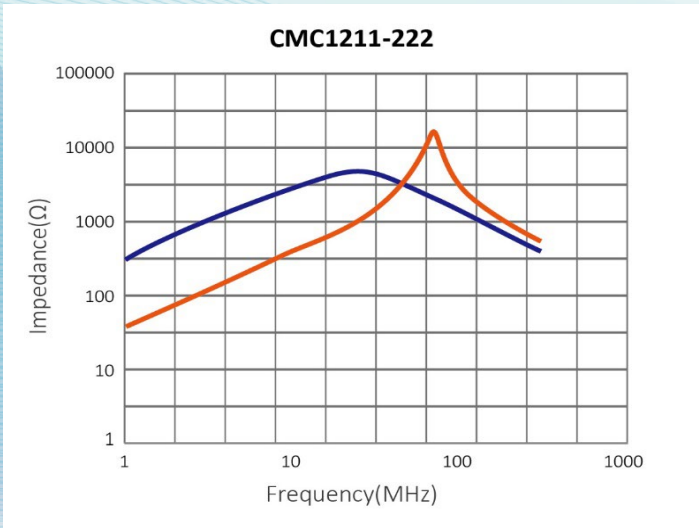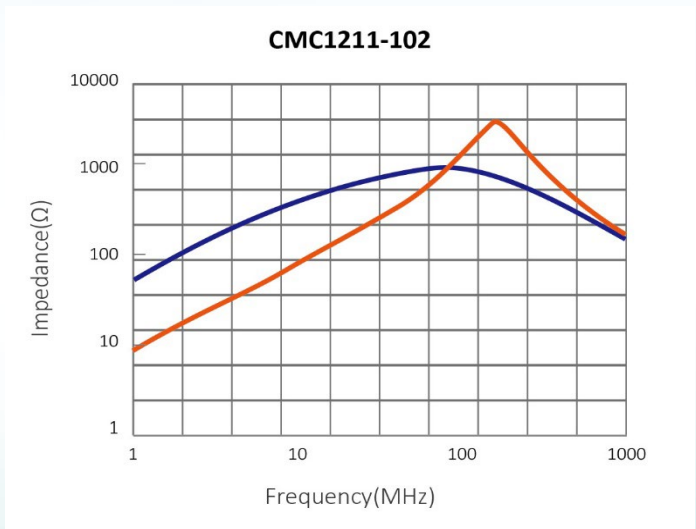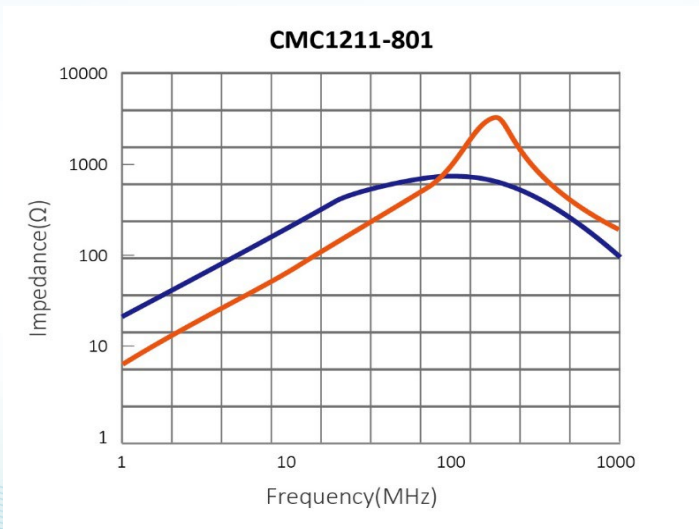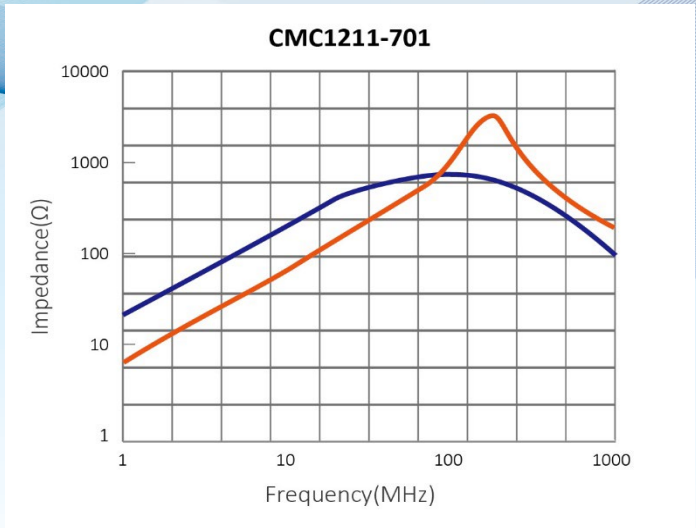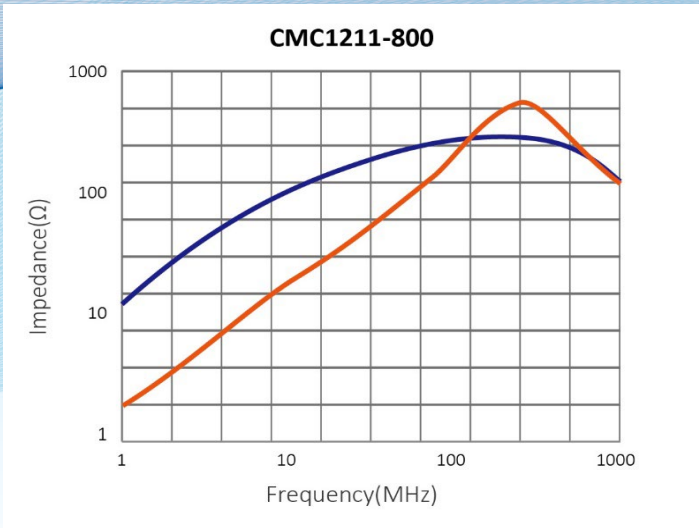

**TAPE AND REEL SPECIFICATIONS**

