


SPECIFICATION FOR APPROVED 樣品承認書

2023
NEW

機構圖 Shape and Dimensions(mm):

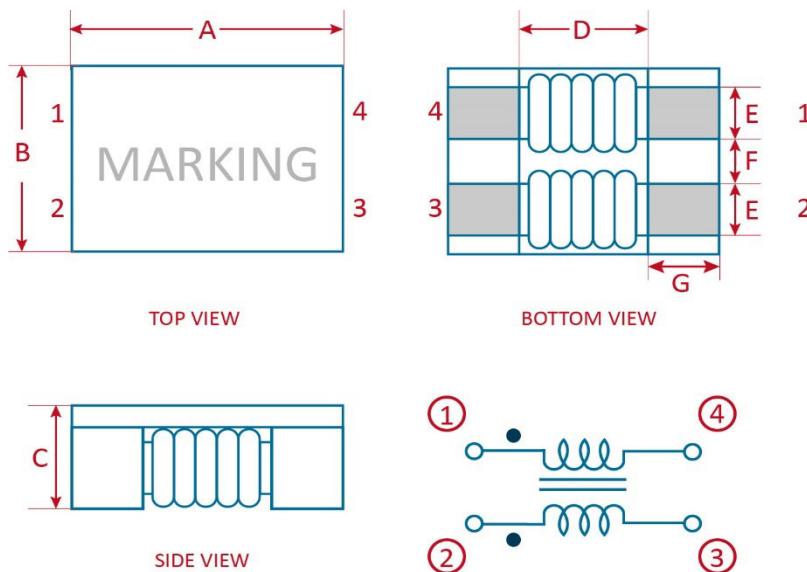

Item	A	B	C	D	E	F	G
CMC9070	9.0±0.5	7.0±0.5	4.8 Max.	5.7 Typ.	1.5 Typ.	2.0 Typ.	1.7 Typ.

印字Marking：印字顏色因生產設備而有所差異

CMC9070

Part No.	Z(Ω)		DCR(mΩ)	Rated Current(A)	IR(mΩ)	Rated Voltage(V)
	Min.	Typ.	Max.	Max.	Min.	Max.
CMC9070-301	225	300	6.0	6.0	10	50
CMC9070-501	450	600	8.0	5.5	10	50
CMC9070-701	500	700	10	5.0	10	50
CMC9070-102	750	1000	13	4.0	10	50
CMC9070-152	1100	1500	18	3.5	10	50
CMC9070-272	2000	2700	86	2.0	10	50

SPECIFICATION FOR APPROVED
樣品承認書

 宏信科技股份有限公司
HT-TECH CORPORATION

2023
NEW

Ordering information

CMC9070 - 301

(1) (2)

(1) Type : COMMON MODE CHOKE

(2) Inductance : R22 for 0.22uH,1R0 for 1.00uH,2R2 for 2.2uH...

Characteristics


- Rated Current : DC current (A)that will cause an approximate ΔT of 40°C (Typical)
- Operating temperature range : -30°C to +100°C

Test equipment


- Test Frequency : 100MHz ,0.5 Vrms.




CMC9070-301

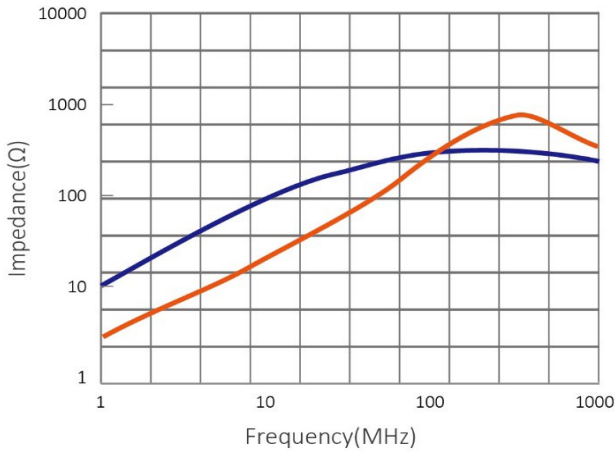


CMC9070-501

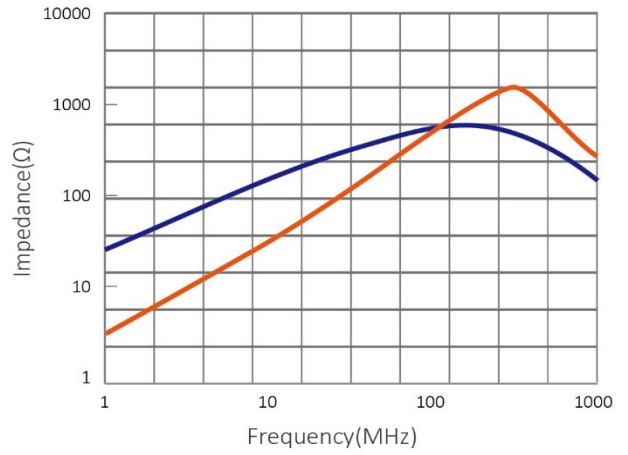


CMC9070-701

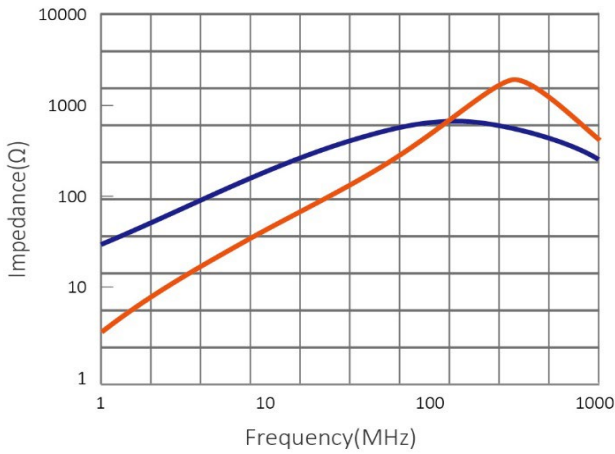


CMC9070-102

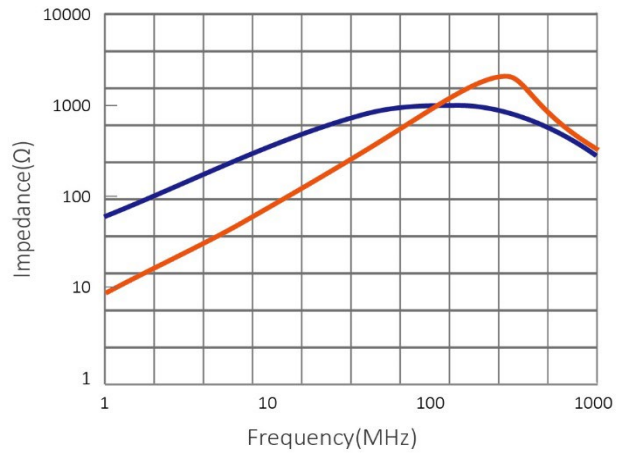

CMC9070-152

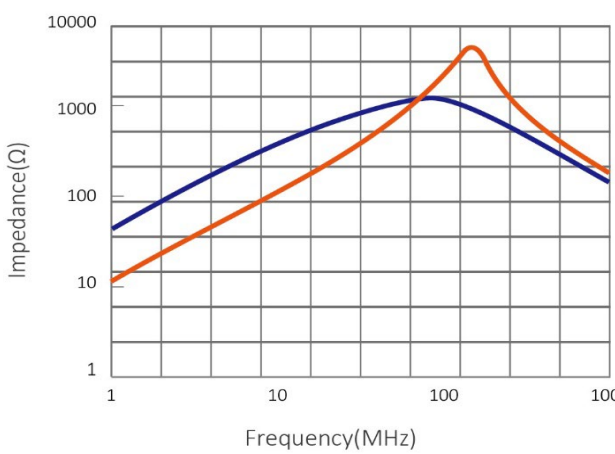

CMC9070-272

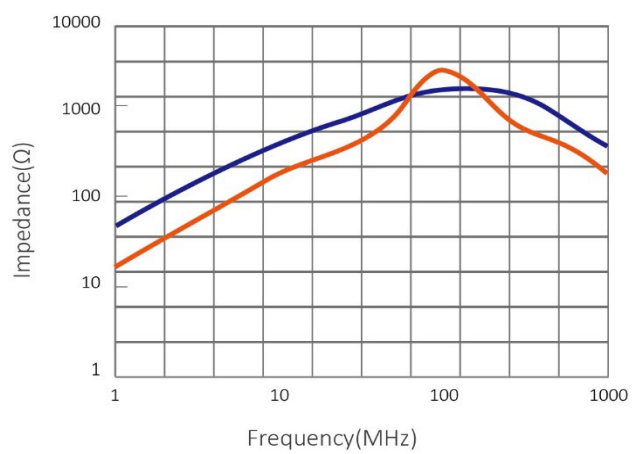

TAPE AND REEL SPECIFICATIONS

